



BOSCH



PROFESSIONAL BLUE POWER TOOLS FOR TRADE AND INDUSTRY Range 2019




Edition: March 2019

DELIVERING USER CONVENIENCE at every step

Ease of
Use

Ease of
Earning

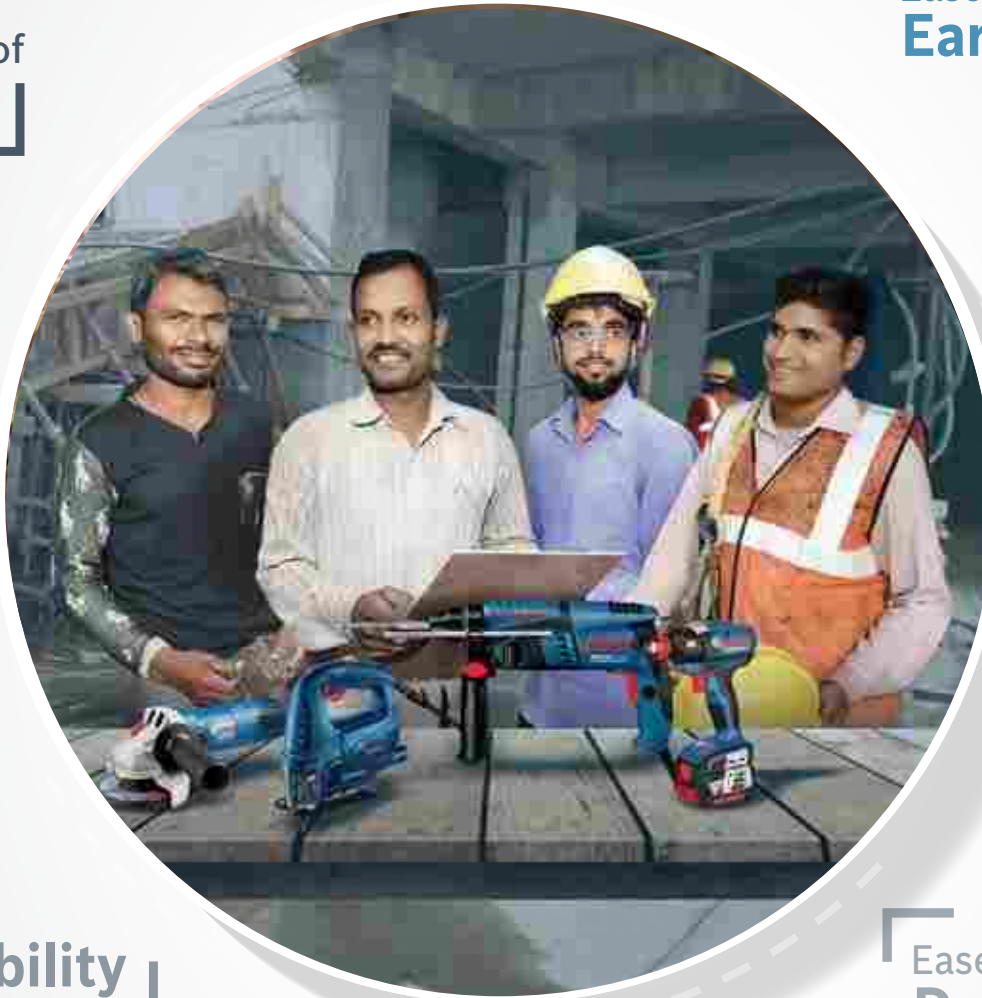

Ease of
Reliability

Ease of
Durability

Ease of
Repair & Service

Ease of
Availability

At Bosch Power Tools, we understand the challenges that our users face every day. Our legacy has been founded on innovation which supports real users, up against real challenges in the workplace. Users who work hard, despite a harsh working environment and are continuously driven by the need to work more efficiently and productively. This is the reason why our products are designed to deliver user convenience at every step. From ease of repair to long life, reliability, sturdiness and much more, every Bosch power tool offers value and convenience to its users.

HEAVY DUTY

We deliver unmatched endurance coupled with reliability and world-class performance. All Bosch products are powered by innovation and technology engineered to outlast customer expectations.

For over a century, Bosch has been dedicated to creating advanced, efficient solutions for professionals at work. However, we have noted that some of our users were not completely satisfied with the performances of their tools that match their specific needs. This probed us to listen to the users directly resulting in our urge to develop a product portfolio that can really fulfill their demands and more.

Continual innovation, intensive research and development have helped Bosch create this new Heavy Duty product range, designed to make your every heavy duty task easier by providing the optimum solution.



All Heavy Duty products are designed to handle extremely demanding jobs by giving users more of everything!

POWER

Each product is built with enough power to drill, hammer and cut through the toughest problems with extreme ease.

PERFORMANCE

Increased power naturally leads to higher performance that results in the most efficient solution possible.

ROBUSTNESS

The same tool can solve every need you might have for many years to come because each one is built to last guaranteed!

Every tool in the Bosch Heavy Duty Range comes with a one-year warranty.

In this handbook, we will proudly introduce our Heavy Duty tools along with the facilitating technologies, detailed product features and user benefits. Some examples of industry specific applications in different user environments are included to help you select the right solution for your task at hand. You are sure to find the tool you need in our comprehensive product range.

**Bosch Heavy Duty
Designed to outlast all your demands.**



Designed for exceptional portability

Bosch brings to you an exclusive range of Power Tools that are ideal for modular furniture applications in homes and offices. These proficient tools are ergonomically designed to accomplish tasks in hard to reach corners effortlessly with the promise of excellent work experience.

SCREWDRIVER

Bosch GO Solo Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 9H2 0F0
Battery voltage	3.6 V
Battery capacity	1.5 Ah
Torque, max. (hard/soft)	5 / 2.5 Nm
Torque adjustment range, min. / max.	4 Nm
No-load speed	360 rpm
Charging time	90 mins
Weight incl. battery	0.28 kg

Scope of supply:
Small plastic box;
1 PH2 screw bit; USB cable

MRP: ₹ 3,240



SCREWDRIVER

Bosch GO Kit Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 9H2 0F1
Battery voltage	3.6 V
Battery capacity	1.5 Ah
Torque, max. (hard/soft)	5 / 2.5 Nm
Torque adjustment range, min. / max.	4 Nm
No-load speed	360 rpm
Charging time	90 mins
Weight incl. battery	0.28 kg

Scope of supply:
Small plastic box;
33 bit accessory kit; USB cable;
USB charger

MRP: ₹ 3,920



SCREWDRIVER

IXO 3 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 960 2K0
Battery voltage	3.6 V
Chuck capacity	5 mm
Max. torque (soft/hard)	3 / 4 Nm
No-load speed	180 rpm
Weight incl. battery	0.3 kg

Scope of supply:
1 Charger; Hex drill bit;
Screw driver bit set;
Universal holder

MRP: ₹ 4,420



***Product available till stock last**

SCREWDRIVER

GSR ProDrive Professional

1

CORDLESS



Technical Specifications

HSN code	84672100
Part no.	0 601 9A2 0K1
Battery voltage	3.6 V
Battery capacity	1.3 Ah
No-load speed	0 - 250 rpm
Torque, max. (hard/soft)	7 / 3 Nm
Max. screw diameter	5 mm
Charging time, approx.	60 min
Vibration emission value ah	2.5 m/s ²

Scope of supply:

1 Charger; Hex drill bit; Holster;
Screw driver bit set; Soft bag;
Universal holder; 1
x 1.3 Ah Li-ion battery

MRP: ₹ 5,860



*Product available till stock last

DRILL DRIVER

New! GSR 120 Li Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 9G8 0F0
Battery voltage	12 V
No-load speed (1 st /2 nd)	0 - 400 / 0 - 1500 rpm
Torque (Hard/Soft)	30 / 14 Nm
Max. screw diameter	7 mm
Max. drilling (wood/steel)	20 / 10 mm
Chuck size	10 mm

Scope of supply:

2 x 12V 1.5 Ah Li-ion Batteries,
1 Charger, Carry Case

MRP: ₹ 9,400



DRILL DRIVER

GSR 12 V-15 FC Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 9F6 0K0
Battery voltage	12 V
Battery capacity	2 Ah
No-load speed (1 st /2 nd)	0 - 400 / 0 - 1300 rpm
Torque (Hard/Soft)	30 / 15 Nm
Max. screw diameter	7 mm
Max. drilling (wood/steel)	19 / 10 mm
Chuck size	10 mm

Scope of supply:

Drill chuck adapter GFA 12-B;
Off-set angle adapter GFA 12-E;
Angle adapter GFA 12-W;
Hex adapter; 1 Charger;
2 x 2 Ah Li-ion Battery; Carry case

MRP: ₹ 21,920



DRILL DRIVER

GSR 12 V-EC Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 9D4 0K2
Battery voltage	12 V
Battery capacity	2 Ah
No-load speed (1 st /2 nd)	0 - 400 / 0 - 1300 rpm
Torque (Hard/Soft)	20 / 18 Nm
Max. screw diameter	7 mm
Max. drilling (wood/steel)	25 / 10 mm
Chuck size	10 mm

Scope of supply:

Carry case; 2 x 2.0 Ah batteries;
Quick charger

MRP: ₹ 16,600



*Product available till stock last

DRILL DRIVER

GSR 180 Li Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 9F8 1K0
Battery voltage	18 V
Battery capacity	1.5 Ah
No-load speed (1 st /2 nd)	0 - 450 / 0 - 1700 rpm
Torque (Hard/Soft)	54 / 21 Nm
Max. screw diameter	10 mm
Max. drilling (wood/steel)	35 / 10 mm
Chuck size	13 mm

Scope of supply:
2 x 1.5 Ah Li-ion batteries;
1 charger; Carry case

MRP: ₹ 14,580



DRILL DRIVER

GSR 18 V-EC Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 9E8 1K0
Torque, max. (hard/soft)	60 / 31 Nm
No-load speed (1 st gear/2 nd gear)	0 - 600 / 0 - 1900 rpm
Drill spindle thread	1/2"
Battery voltage	18 V
Charging time, approx.	45 mins
Torque settings	20+1
Length x Height	173 x 248 mm
Bit holder	Three-jaw chuck

Scope of supply:
Carry case; 1 charger;
2 x 2.0 Ah Li-ion batteries

MRP: ₹ 28,580



IMPACT DRILL

New! GSB 120 Kit Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 9G8 1K2
Battery voltage	12 V
Battery capacity	1.5 Ah
No-load speed (1 st /2 nd)	0 - 400 / 0 - 1500 rpm
Torque (Hard/Soft)	30 / 14 Nm
Impact Rate	0 - 18,750 bpm
Max. drilling (wood/steel/masonry)	20 / 10 / 8 mm
Weight with Battery	1.1 kg

Scope of supply:
Carry case; 1 Charger;
2 x 1.5 Ah Li-ion battery;
100 pcs accessory set

MRP: ₹ 10,800



IMPACT DRILL

GSB 180-Li Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 9F8 3K0
Battery voltage	18 V
Battery capacity	1.5 Ah
No-load speed (1 st /2 nd)	0 - 450 / 0 - 1700 rpm
Torque (Hard/Soft)	54 / 21 Nm
Max. screw diameter	10 mm
Max. drilling (wood/steel/masonry)	35 / 10 / 8 mm
Chuck size	13 mm

Scope of supply:
2 x 1.5 Ah Li-ion batteries;
1 charger; Carry case

MRP: ₹ 15,340



IMPACT WRENCH

GDR 120 Li Professional

1

CORDLESS



Technical Specifications

HSN code	84672100
Part no.	0 601 9F0 0K6
Battery voltage	12 V
Battery capacity	2 Ah
No-load speed (1 st /2 nd)	0 - 1300 / 0 - 2600 rpm
Torque (Hard)	100 Nm
Max. screw diameter	8 mm
Rated impact rate	0 - 1900/0 - 3200 bpm
Bit holder	1/4" hexagon socket

Scope of supply:
2 x 2.0 Ah batteries, 1 charger, **MRP: ₹ 12,910**
1 carry case



IMPACT DRIVER

GDR 12 V-EC Professional



Technical Specifications


HSN code	84672100
Part no.	0 601 9E0 0F6
Battery voltage	12 V
Battery capacity	2 Ah
No-load speed (1 st /2 nd)	1200 / 2600 rpm
Torque (Hard)	110 Nm
Max. screw diameter	8 mm
Rated impact rate	0 - 3100 bpm
Bit holder	1/4" internal hexagon

Scope of supply:
Carry case; 2 x 2Ah batteries; **MRP: ₹ 20,680**
1 charger



IMPACT DRIVER

GDR 18 V-EC Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 9B9 3F0
Length	139 mm
No-load speed (1 st /2 nd gear)	0 - 2800
Weight incl. battery	1.6 kgs.
Torque, max. (hard screwdriving applications)	170 Nm
Rated impact rate	0 - 3200 bpm
Battery voltage	18 V

Scope of supply:
2 x 4 Ah Li-ion batteries; **MRP: ₹ 43,040**
1 charger; Carry case



IMPACT WRENCH

GDS 12 V-EC Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 9E0 1F5
Battery voltage	12 V
Battery capacity	2 Ah
No-load speed (1 st /2 nd)	0 - 2600 rpm
Torque (Hard)	115 Nm
Standard bolting capacity	M6 - M14
Rated impact rate	0 - 3100 bpm
Bit holder	3/8" external square

Scope of supply:
Carry case; 2 x 2Ah battery; **MRP: ₹ 27,200**
1 charger



IMPACT WRENCH

GDS 250 Li Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 9G6 1K0
Battery voltage	18 V
Max torque	250 Nm
No-load speed	0 - 2,400 min ⁻¹
Impact rate	0 - 3,300 bpm
Tool holder	1/2" Square
Screw size	M10~ M18

Scope of supply:
2 x 3 Ah Li-ion batteries;
1 charger; Carry case

MRP: ₹ 26,910



IMPACT WRENCH

GDS 18 V-EC 250 Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 9D8 1F0
No-load speed	0 - 2,400 rpm
Length	163 mm
Height	245 mm
Weight incl. battery	1.85 kgs.
Torque, max. (hard screwdriving applications)	250 Nm
Rated impact rate	0 - 3400 bpm
Battery voltage	18 V
Toolholder	1/2" external square
Screw dia.	M 10 - M 18

Scope of supply:
2 x 4 Ah Li-ion batteries;
1 charger; Carry case

MRP: ₹ 44,600



IMPACT WRENCH

GDS 18 V-LI HT Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 9A1 3F2
Torque max.	650 Nm
No-load speed	0 - 1900 rpm
Rated impact rate	0 - 2100 bpm
Screw diameter	M 12 - M 20
Tool holder	1/2" external square
Weight	3 kgs.

Scope of supply:
2 x 4 Ah Li-ion batteries;
1 charger; Carry case

MRP: ₹ 70,960



IMPACT WRENCH

GDX 18 V-EC Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 9B9 1F0
Battery voltage	18 V
Torque max.	180 Nm
No-load speed	0 - 2,800 rpm
Rated impact rate	0 - 3200 bpm
Bit holder	1/4" Internal Hex socket + 1/2" External square

Scope of supply:
2 x 4 Ah Li-ion batteries;
1 charger; Carry case

MRP: ₹ 37,790



ROTARY HAMMER 1-2 KG



Technical Specifications

HSN code	84672900
Part no.	0 611 911 0F2
Battery Voltage	4.0 Ah
No-load speed	0 - 1,800 rpm
Rated impact rate	0 - 4,550 bpm
Impact force	1.7 J
Drilling capacity	20 mm
LED light	Yes
Mode	3
Weight	2.6 kgs.

Scope of supply:
2 x 3.0 Ah Li-Ion batteries;
1 charger

MRP: ₹ 30,720



GBH 180 Li Professional



CORDLESS

ROTARY HAMMER 3 KG



Technical Specifications

HSN code	84672100
Part no.	0 611 906 003
Max. impact energy	3,2 J
Impact rate at rated speed	0 - 4,200 bpm
Rated speed	0 - 940 rpm
Battery voltage	36 V
Battery capacity	4 Ah
Weight incl. battery	4.5 kgs.
Length/Width/Height	383/108/246mm
Drilling dia. in concrete with hammer drill bits	4 - 28 mm
Max. drilling dia. in steel/wood	13/30 mm

Scope of supply:
Carry case; Depth stop; Auxiliary handle;
Charger; 2 x 4.0 Ah Li-Ion batteries

MRP: ₹ 76,290



GBH 36-V-28 Professional



VACUUM CLEANER



Technical Specifications

HSN code	85081100
Part no.	0 601 9C6 2K1
Battery Voltage	18 V
Container volume	0.7 l
Length	142 mm
Width	184 mm
Height	121 mm
Filter surface area	55 cm²
Weight excl. battery	1.3 kgs.

Scope of supply:
1 x 3.0 Ah battery; Charger;
4 accessories

MRP: ₹ 14,680



GAS 18 V-1 Professional



BATTERY PACK AND CHARGER

GBA 12 V 2.0 Ah O-B Professional



Technical Specifications

HSN code	85076000
Part no.	1 600 A00 F6X
Battery voltage	12 V
Battery capacity	2 Ah
Weight	175 g
Variable (LxWxH)	51X48X85 mm

Suitable for

- 10.8 V
- 12.0 V

Bosch cordless tools range
(Tubular battery version)

MRP: ₹ 2,615

BATTERY

GBA 14.4 V 4.0 Ah M-C Professional



Technical Specifications

HSN code	85076000
Part no.	1 600 A00 162
Battery voltage	14.4 V
Battery capacity	4 Ah
Length	98 mm
Width	74 mm
Height	56 mm
Weight	500 g

Suitable for

- All 14.4 V

Bosch cordless tools range

MRP: ₹ 6,860

BATTERY

GBA 18 V 2.0 Ah Professional



Technical Specifications

HSN code	85076000
Part no.	1 600 A00 1CG
Battery voltage	18 V
Battery capacity	2 Ah
Length	113 mm
Width	75 mm
Height	40 mm
Weight	300 g

Suitable for

- All 18 V

Bosch cordless tools range

MRP: ₹ 4,900

BATTERY

GBA 18 V 4.0 Ah M-C Professional



Technical Specifications

HSN code	85076000
Part no.	1 600 A00 163
Battery voltage	18 V
Battery capacity	4 Ah
Length	115 mm
Width	74 mm
Height	56 mm
Weight	600 g

Suitable for

- All 18 V

Bosch cordless tools range

MRP: ₹ 7,440

CHARGER

GAL 12 V-40 Professional

2



Technical Specifications

HSN code	85044030
Part no.	1 600 A01 B8X
Charge current A	4
Charging time min	24 min
Input voltage(s) V	230
Model	Li-Ion quick charger
Weight, approx.	0.4 kg

Suitable for charging of

- 10.8 V
 - 12.0 V
- Bosch tubular batteries

MRP: ₹ 2,980

CHARGER

AL 1860 CV Professional



Technical Specifications

HSN code	85044030
Part no.	1 600 A00 1DH
Charge current A	6
Charging time min	45 min
Input voltage(s) V	230
Country version	EU
Model	Li-Ion quick charger
Charge monitoring	Constant-Current, Constant-Voltage charging control
Weight, approx.	0.765 kg

Suitable for charging of

- 14.4 V
 - 18.0 V
- Bosch batteries

MRP: ₹ 4,250

CHARGERS/
BATTERIES

BUILT FOR CHAMPS

Bosch Battery Technology



IMMENSE POWER FOR THE TOUGHEST JOBS

Bosch Hammer

DEMOLITION
HAMMERS



DEMOLITION HAMMER < 5 KG

New! GSH 500 Professional

3



Technical Specifications

HSN code	84672100
Part no.	0 611 338 6F0
Input Power	1100 W
Impact Rate at rated speed	2900 bpm
Impact Energy	7.8 J
Toolholder	17 Hex mm
Side Handle	Straight Handle
Weight	5.5 kgs.

Scope of supply:
Auxiliary handle

MRP: ₹ 21,040



DEMOLITION HAMMER < 5 KG

GSH 5 Professional




Technical Specifications

HSN code	84672100
Part no.	0 611 337 0K0
Rated power input	1100 W
Impact energy	7,5 J
Rated speed	2850 rpm
Weight without cable	5.6 kgs.

*with vario lock feature for chisel adjustment

Scope of supply:
Pointed chisel; Carry case;
Cleaning cloth; Grease tube;
Straight handle

MRP: ₹ 36,100

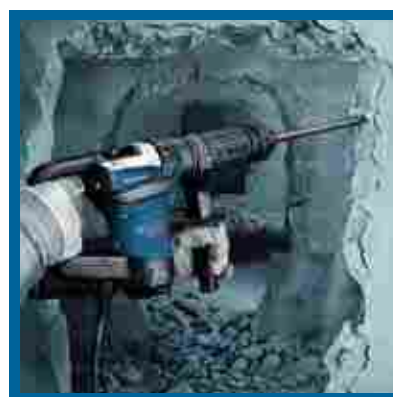

DEMOLITION HAMMER < 11 KG

GSH 11 E Professional



Technical Specifications

HSN code	84672200
Part no.	0 611 316 8F0
Power input	1500 W
Impact rate	900 - 1890 bpm
Impact energy	16.8 J
Weight	10.1 kgs.

Scope of supply:
Auxiliary handle; Carry case;
Grease tube; RTec pointed chisel

MRP: ₹ 46,490



DEMOLITION HAMMER < 11 KG

GSH 11 VC Professional



Technical Specifications

HSN code	84672100
Part no.	0 611 336 000
Power input	1700 W
Impact energy	23 J
Impact rate at rated speed	1700 bpm
Weight without cable	11.4 kgs.

Scope of supply:
Auxiliary handle; Carrying case;
Grease tube; Machine cloth;
Pointed chisel

MRP: ₹ 76,820



DEMOLITION
HAMMERS

DEMOLITION HAMMER > 12 KG

GSH 16-30 Professional



Technical Specifications

HSN code 84672100

Part no. 0 611 335 1F0

Power input 1750 W

Impact rate 1300 bpm

Impact energy 45 J

Weight 16.5 kgs.

Scope of supply:
Carrying handle; Trolley;
Grease tube; Machine cloth;
Pointed chisel

MRP: ₹ 1,12,790



DEMOLITION HAMMER > 12 KG

GSH 27 VC Professional



Technical Specifications

HSN code 84672100

Part no. 0 611 30A 000

Rated power input 2000 W

Impact energy 69 J

Impact rate at rated speed 1000 bpm

Weight 29.5 kgs.

Scope of supply:
Paper box;
Plastic Bags

MRP: ₹ 2,28,840



ROTARY HAMMER 1-2 KG



Technical Specifications

HSN code	84672100
Part no.	0 611 258 3F2
Rated power input	550
Impact energy	2,2 J
Impact rate at rated speed	0 - 3960
Rated speed	0 - 1550
Drilling dia. in concrete	4 - 20
Optimum range in concrete	4 - 12
Max. drilling dia. in steel	13 mm
Max. drilling dia. in wood	30 mm
Weight	2.3 kgs.
Scope of supply: Auxiliary Handle; Depth Gauge; Carry case	

MRP: ₹ 8,090

GBH 200 Professional



ROTARY HAMMER 1-2 KG



Technical Specifications

HSN code	84672100
Part no.	0 611 250 655
Drilling dia. in concrete	4 - 22 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	30 mm
Core bits masonry	68 mm
Power input	620 W
No-load speed	0 - 1000 rpm
Single impact energy	0 - 2.2 J
Weight	2.3 kgs.


Scope of supply:
Auxiliary Handle; Depth Gauge; Carry case

MRP: ₹ 11,730

GBH 2-22 E Professional



ROTARY HAMMER 1-2 KG



Technical Specifications

HSN code	84672100
Part no.	0 611 250 755
Drilling dia. in concrete	4 - 22 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	30 mm
Core bits masonry	68 mm
Power input	620 W
No-load speed	0 - 1000 rpm
Single impact energy	2.2 J
Weight	2.3 kgs.

Scope of supply:
Auxiliary Handle; Depth Gauge; Carry case

MRP: ₹ 12,140

GBH 2-22 RE Professional



ROTARY HAMMER + SDS ADAPTOR DRILL CHUCK



Technical Specifications

HSN code	84672100
Part no.	0 611 272 1K6
Power input	790 W
Impact Energy	2.7 J
Drilling Capacity	24 mm
No-load speed	1300 rpm
Impact Rate	4,200 bpm
Length x Height	367 x 210
Weight	2.8 kgs.

*with carry case *Available in Promo Version only

+ SDS Adaptor 13 mm Drill Chuck - Part No. 2607000982

MRP: ₹ 13,810

GBH 2-24 DRE Professional



*Limited Period Offer



+ GWS 750
Angle Grinder



*Limited Period Offer

Technical Specifications - GBH 2-24 DRE

HSN code	84672100
Part no.	0 611 272 1K7
Power input	790 W
Impact Energy	2.7 J
Drilling Capacity	24 mm
No-load speed	1300 rpm
Impact Rate	4,200 bpm
Length x Height	367x210
Weight	2.8 kgs.

*with carry case

Technical Specifications + GWS 750

HSN code	84672100
Power input	750 W
No-load speed	11,000 rpm
Disc Dia.	100/115/125
Grip Size	59*54.5
Perimeter	187 mm
Voltage	100,110,115,127, 220~240 V

*with carry case

*Available in Promo Version only

MRP: ₹ 17,170



ROTARY HAMMER 1-2 KG

GBH 2-26 E Professional



Technical Specifications

HSN code	84672100
Part no.	0 611 251 655
Drilling dia. in concrete	4 - 26 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	30 mm
Core bits masonry	68 mm
Power input	800 W
No-load speed	0 - 900 rpm
Single impact energy	0 - 3 J
Weight	2.7 kgs.


Scope of supply:
Auxiliary Handle; Depth Gauge;
Carry case

MRP: ₹ 15,750



ROTARY HAMMER 1-2 KG

GBH 2-26 RE Professional



Technical Specifications

HSN code	84672100
Part no.	0 611 251 755
Drilling dia. in concrete	4 - 26 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	30 mm
Core bits masonry	68 mm
Power input	800 W
No-load speed	0 - 900 rpm
Single impact energy	0 - 3 J
Weight	2.7 kgs.

Scope of supply:
Auxiliary Handle; Depth Gauge;
Carry case

MRP: ₹ 16,050



ROTARY HAMMER 1-2 KG



Technical Specifications


HSN code	84672100
Part no.	0 611 253 755
Drilling dia. in concrete	4 - 26 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	30 mm
Core bits masonry	68 mm
Power input	800 W
No-load speed	0 - 900 rpm
Single impact energy	0 - 3 J
Weight	2.7 kgs.

Scope of supply:
Auxiliary Handle; Depth Gauge; Carry case

MRP: ₹ 17,300



ROTARY HAMMER 1-2 KG

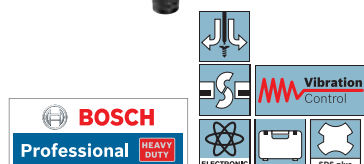

Technical Specifications

HSN code	84672100
Part no.	0 611 267 1F0
Drilling dia. in concrete	4 - 28 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	30 mm
Core dia. masonry	68 mm
Rated power input	850 W
Rated speed	0 - 1300 rpm
Impact rate at rated speed	0 - 5100 bpm
Impact energy	0 - 3.2 J
Weight	2.9 kgs.

Scope of supply:
Auxiliary Handle; Depth Gauge; Carry case

MRP: ₹ 19,550



ROTARY HAMMER 3 KG



Technical Specifications

HSN code	84672100
Part no.	0 611 23A 0K0
Drilling dia. in concrete	4 - 28 mm
Drilling dia. in steel	13 mm
Core bits masonry	82 mm
Power input	800 W
No-load speed	0 - 900 rpm
Single impact energy	0 - 3.5 J
Weight	3.5 kgs.

Scope of supply:
Auxiliary Handle; Carry case; Depth stop

MRP: ₹ 28,100



ROTARY HAMMER 4 KG



Technical Specifications

HSN code	84672100
Part no.	0 611 332 1F0
Drilling dia. in concrete	6 - 32 mm
Drilling dia. in steel	13 mm
Drilling dia. in wood	32 mm
Power input	900 W
No-load speed	0 - 760 rpm
Single impact energy	0 - 5 J
Weight	4.7 kgs.

Scope of supply:
Auxiliary Handle; Carry case; Depth stop; SDS-plus quick-change chuck

MRP: ₹ 32,610



ROTARY HAMMER 5 KG AND MORE

GBH 5-40 D Professional



Technical Specifications

HSN code	84672100
Part no.	0 611 269 0K0
Drilling dia. in concrete	40 - 90 mm
Rated power input	1,100 W
Impact energy	8.5 J
Impact rate at rated speed	1500 - 2900 bpm
Rated speed	170 - 340 rpm
No-load speed	0 - 760 rpm
Weight	6.8 kgs.

Scope of supply:

Carrying cases; Cleaning cloth;
Grease tube; Auxiliary handle **MRP: ₹ 48,620**



ROTARY HAMMER 5 KG AND MORE

GBH 8-45 DV Professional



Technical Specifications

HSN code	84672100
Part no.	0 611 265 0K0
Rated power input	1500 W
Impact energy	12 - 5 J
Impact rate at rated speed	1380 - 2720 bpm
Rated speed	0 - 305 rpm
Weight without cable	8.9 kgs.
Drilling dia. concrete, hammer drill bits	12 - 45 mm
Optimum range of applications in concrete with hammer drill bits	20 - 40 mm
Drilling dia. in concrete with breakthrough drill bits	80 mm


Scope of supply:

Grease tube; Cleaning cloth; Carrying case **MRP: ₹ 87,740**



ROTARY HAMMER 5 KG AND MORE

GBH 12-52 DV Professional



Technical Specifications

HSN code	84672100
Part no.	0 611 2660 000
Input Power	1700 W
Max. impact energy	19 J
Impact rate at rated speed	1750 - 2150 bpm
Rated speed	0 - 220 rpm
Weight	11.9 kgs.
Length	600 mm
Width	120 mm
Height	312 mm
Drilling dia. in concrete with hammer drill bits	12 - 52 mm

Scope of supply:

Carrying case, Grease tube;
Machine cloth; Auxiliary handle **MRP: ₹ 1,05,080**



DIAMOND DRILL

GDB 180 WE Professional

5



Technical Specifications

HSN code	84672100
Part no.	0 601 189 800
Rated power input	2000 W
Weight without cable	5.2 kgs.
Drilling range	180 mm
Length	481 mm
Width	108 mm
Height	294 mm
Suitability	Wet drilling in concrete
Concrete, possible range	180 mm
Masonry, possible range	180 mm
Vibration emission value ah	4.8 m/s ²
Scope of supply:	Adapter dust extraction; Ball valve; Carry case
MRP:	₹ 1,54,750



DIAMOND DRILL

GCR 180 Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 190 100
Drilling diameter	180 mm
Working length, Z-axis	455 mm
Column length	767 mm
Drill stroke	514 mm
Weight	9.5 kgs.

MRP: ₹ 1,15,040



DIAMOND DRILL

GDB 350 WE Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 189 900
Rated power input	3200 W
Weight without cable	11.9 kgs.
Drilling range	350 mm
Length	534 mm
Width	142 mm
Height	167 mm
Suitability	Wet drilling in concrete
Concrete, possible range	350 mm
Scope of supply:	Water coupling
MRP:	₹ 2,33,700



DIAMOND DRILL

GCR 350 Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 190 200
Drilling diameter	350 mm
Working length, Z-axis	550 mm
Column length	955 mm
Drill stroke	580 mm
Weight	12.6 kgs.

Scope of supply:
Adapter for GDB 350 WE
diamond drill

MRP: ₹ 1,57,090



DIAMOND
TECHNOLOGY

DIAMOND/STONE CUTTER

GDC 120 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 393 0F1
Rated power input	1200 W
No-load speed	12000 rpm
Tool blade	4 inch
Net weight	2.5 kgs.
Cutting depth (at 90°)	34 mm
Cord length	1.5 m

MRP: ₹ 4,650



DIAMOND/STONE CUTTER

GDC 121 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 393 1F1
Rated power input	1200 W
No-load speed	12000 rpm
Tool blade	5 inch
Net weight	2.5 kgs.
Cutting depth (at 90°)	34 mm
Cord length	1.5 m

MRP: ₹ 5,160



BLOWER



6 month warranty



Technical Specifications

HSN code	84145920
Part no.	0 601 980 5F0
Power input	620 W
No-load speed	16000 rpm
Weight without cable	1.7 kgs.
Volumetric flow rate	3.5 m³/min
Standard Accessories	1 Nozzle

MRP: ₹ 3,540

GBL 620 Professional



BLOWER

New! GBL 82-270 Professional



Technical Specifications

HSN code	85081100
Part no.	0 601 980 4F5
Input power	800 W
No-load speed	16000 rpm
Flow rate	0-4.5 m³/s
Weight	1.8 kgs.

Scope of supply:
50 mm nozzle, Extension nozzle,
Borehole nozzle, Dust bag

MRP: ₹ 5,850



HEAT GUN

GHG 180 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 94D 0F0
Power input	1800 W
Max Temperature	60 / 350 / 550°C
Air Flow Rate	350 / 350 / 550 lpm
Over-heat protection	Yes
Weight	0.75 kg

Scope of supply:
Reducing nozzle

MRP: ₹ 3,060



HEAT GUN

New! GHG 20-63 Professional



HEAVY DUTY

Technical Specifications

HSN code	84672900
Part no.	0 601 2A6 2K0
Power input	2,000 W
Temperature range	50-630°C
Adjustable temperature steps	Yes
Air flow rate	~ 150 / 300 / 500 rpm
Durability	600 h
Weight	0.65 kg

Scope of supply:
Glass protection nozzle,
Surface nozzle, Welding glove,
Reduction nozzle,
Reflection nozzle

MRP: ₹ 9,110



HEAT GUN

New! GHG 20-60 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 2A6 400
Power input	2,000 W
Temperature max	50-630°C
Adjustable temp steps	Yes
Air flow rate	150 / 500 rpm
Infinitely variable airflow control	No
Durability	500-750 h
Weight	0.55 kg

Scope of supply:
Glass protection nozzle

MRP: ₹ 10,130



METAL SURFACE FINISH

GPO 950 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 3A2 0F0
Power	950 W
Variable Speed	600 - 2,100 rpm
Adaptor Size	M14 / M16
Stick pad diameter	ø165 mm
Max. accessory diameter	180 mm
Cable length	4 m
Features	Soft Start, Constant/ Variable Speed
Weight	2.3 kgs.

Scope of supply:
Sponge pad; Stick pad;
M14 & M16 adaptor; Wrench;
Aux handle; Aux plate

MRP: ₹ 9,490



METAL SURFACE FINISH

GPO 12 CE Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 389 0F0
No-load speed	750 - 3000 rpm
Grinding spindle thread	M 14
Rubber sanding plate	180 mm
Power input	1250 W
Weight	2.5 kgs.

*Package doesn't contain polishing pad

Scope of supply:
M14/M16 adaptor; Auxiliary handle;
Spacer disc; Auxiliary D-handle; Wrench

MRP: ₹ 14,470



*Limited Period Offer

METAL SURFACE FINISH

New! GPO 12 CE (Promo) Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 389 0F1
No-load speed	750 - 3000 rpm
Grinding spindle thread	M 14
Rubber sanding plate	180 mm
Power input	1250 W
Weight	2.5 kgs.

Scope of supply:
M14/M16 adaptor;
Auxiliary handle; Spacer disc;
Auxiliary D-handle;
Wrench; Polishing pads

MRP: ₹ 15,250



RECIPSAW



Technical Specifications

HSN code	84672200
Part no.	0 601 64C 8K0
Power input	1100 W
No-load stroke rate:	0 - 2700 spm
Saw, stroke length:	28 mm
Cutting depth in wood:	230 mm
Cutting depth in metal profiles and metal pipes:	20 mm

Scope of supply:

Blade for metal;
Blade for wood;
Carry cases

MRP: ₹ 17,080

GSA 1100 E Professional



6

RECIPSAW



Technical Specifications

HSN code	84672200
Part no.	0 601 64E 200
Power input	1300 W
Stroke rate at no load	0 - 2,900 spm
Weight	4.1 kgs.
Saw, stroke length	28 mm
Cutting depth in wood	230 mm
Cutting depth in metal profiles and metal pipes	20 mm

Vibration emission value ah 21.0 m/s²

Uncertainty K 1.5 m/s²

Scope of supply:

Carry case;
Wood saw blade S 2345 X;
Metal saw blade S 123 XF

MRP: ₹ 19,920

GSA 1300 PCE Professional



VACUUM CLEANER



Technical Specifications

HSN code	85081100
Part no.	0 601 9E5 0K0
Power input	1100 W
Container (gross/net)	15/8 L
Max. Airflow	33 l/s
Max. Vacuum Pressure	22 kPa
Weight	6 kgs.

* Tool Socket for connecting Power Tools.

Scope of supply:

Crevice nozzle; Carton box;
3m anti-static hose; Elbow;
Tubes (2pcs); Plastic Bags;
Floor nozzle set

MRP: ₹ 17,080

New! GAS 15 PS Professional



VACUUM CLEANER



Technical Specifications

HSN code	85081100
Part no.	0 601 97C 0F0
Power input	1250 W
Suction Power	237 W
Vacuum Pressure	200 mbar
Air Flow	63 Motor l/s
Dust Tank Capacity Gross	25 L
Tank Capacity Net Dry/Wet	21/16 L
Main Filter Class	H13 HEPA

Scope of supply:

3M Hose; Elbow; Crevice nozzle,
Floor nozzle set; Adapter;
Tubes (pcs); Plastic bags (5 pcs)

MRP: ₹ 20,150

New! GAS 12-25 Professional



SPECIALITY
TOOLS

VACUUM CLEANER



Scope of supply:

Brown box; Hose with BIA nozzle 3 m, 35 mm diameter;
Elbow; Crevice nozzle; Floor nozzle set; Disposal bag; Tool Sleeve; SFC+ module

Technical Specifications

HSN code	85081100
Part no.	0 601 9C3 060
Max. power input (Turbine)	1380 W
Weight	11.6 kgs.
Container volume, gross	35 l
Container volume, net	23 l
Container volume, net, water	19.2 l
Length	515 mm
Width	450 mm
Height	575 mm
Filter surface area	6,150 cm ²
Max. volume flow rate (Turbine)	74 l/sec
Max. vacuum pressure (Turbine)	254 mbar

MRP: ₹ 65,640

GAS 35 L SFC Professional



*Tool Socket for connecting Power Tools.

VACUUM CLEANER



Technical Specifications

HSN code	85081100
Part no.	0 601 9C3 360
Max. power input (Turbine)	1380 W
Weight	16.2 kgs.
Container volume, gross	55 l
Container volume, net	43 l
Container volume, net, water	40 l
Length/Width/Height	570/450/865 mm
Filter surface area	6,150 cm ²
Max. volume flow rate (Turbine)	74 l/sec
Max. vacuum pressure (turbine)	254 mbar

*Tool Socket for connecting Power Tools.

Scope of supply:

5 m anti-static hose; Elbow;
Crevice nozzle; Floor nozzle set;
Disposal bag; Tool Sleeve

MRP: ₹ 1,00,260

GAS 55 M AFC Professional



OSCILLATING TOOL



Technical Specifications

HSN code	84672900
Part no.	0 601 237 0F0
Rated power input	300 W
No-load oscillation	8,000 – 20,000 opm
Oscillation angle on left and right	1.4°
Weight	1.5 kgs.

Scope of supply:

Carrying case; 1 set sanding sheet, Grit 2x80, Grit 2x120, Grit 1x240; Starlock BIM segment saw blade ACZ 85 EB, Wood & Metal; Starlock BIM plunge cut saw blade AIZ 32 APB, Wood & Metal, Curved-Tec; Starlock sanding plate AVZ 93 G Professional

MRP: ₹ 20,140

GOP 30-28 Professional



WALL CHASER



Technical Specifications

HSN code	84672900
Part no.	0 601 621 703
Adjustable groove depth	0 - 35 mm
Groove width	3 - 39 mm
Disc diameter	150 mm
Power input	1400 W
No-load speed	9300 rpm
Weight	4.1 kgs.

Scope of supply:

Break-out tool; Two-hole spanner,
Carrying cases; Round nut;
Backing flange; 3 spacers 4 mm;
4 spacers 6 mm

MRP: ₹ 61,600

GNF 35 CA Professional



**Technical Specifications**

HSN code	84678920
Part no.	0 601 283 1F1
Input Power	2200 W
Voltage	220/230 V
Vibration per minute	20000 vpm
Diameter of vibrator head	35 mm
Hose Length	3.5 m
Weight	4 kgs.
Relation Power/weight	550

*Tool comes with 1 No. 3.5m x 35mm nose with needle

Scope of supply:
Needle 3.5 m with
35 mm diameter

MRP: ₹ 98,150



BRILLIANT FOR DRILLING

Rotary & Impact Drills



ROTARY DRILL

GBM 6 Professional

7

DRILLS



Technical Specifications

HSN code	84672100
Part no.	0 601 472 0F0
Drilling dia. in wood	15 mm
Drilling dia. in steel	6.5 mm
Power input	350 W
No-load speed	4000 rpm
Weight	1.1 kgs.

Scope of supply:
Keyed chuck

MRP: ₹ 4,060



ROTARY DRILL

GBM 10 RE Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 473 5F0
Drilling diameter in aluminium	10 mm
Drilling diameter in wood	25 mm
Drilling diameter in steel	10 mm
Power input	350 W
No-load speed	4000 rpm
Weight	1.1 kgs.

MRP: ₹ 5,090



ROTARY DRILL

GBM 13 RE Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 477 5F0
Power input	600 W
No-load speed	0 - 2600 rpm
Chuck capacity	1.5 - 13 mm
Drilling dia. in steel	13 mm
Drilling dia. in aluminium	13 mm
Drilling dia. in wood	30 mm
Drill spindle connecting thread	½" - 20UNF
Weight	1.7 kgs.

Scope of supply:
Keyed chuck 13 mm

MRP: ₹ 5,370



ROTARY DRILL

GBM 13-2 Professional




Technical Specifications

HSN code	84672100
Part no.	0 601 169 055
Power input	550 W
No-load speed	0 - 1000/1900 rpm
Chuck capacity	1 - 13 mm
Drilling dia. in steel	13/8 mm
Drilling dia. in aluminium	20/12 mm
Drilling dia. in wood	32/20 mm
Drill spindle connecting thread	½" - 20 UNF
Weight	1.9 kgs.

Scope of supply:
Auxiliary handle; Depth stop;
Keyed chuck

MRP: ₹ 10,480

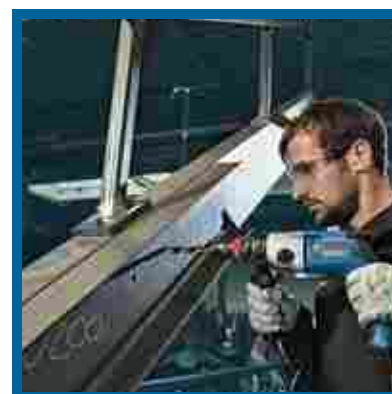

ROTARY DRILL

GBM 1600 RE Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 1B0 0K0
Power input	850 W
No-load speed	0 - 630 rpm
Rated torque	11 Nm
D-Handle position	360° multiple
Lock-on Button	Yes
Stirrer capacity	160 mm
Wood Drilling	40 mm
Metal Drilling	16 mm
Weight	3 kg

Scope of supply:
Auxiliary handle

MRP: ₹ 12,630



ROTARY DRILL

GBM 23-2 Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 121 103
Power input	1050 W
Drilling dia. in steel	23 / 13 mm
Drilling dia. in aluminium	28 / 18 mm
Drilling dia. in wood	50 / 35 mm
Drill spindle connecting thread	MK 2 - DIN 228
Weight	3.7 kgs.

Scope of supply:
Auxiliary handle

MRP: ₹ 66,830



ROTARY DRILL

GBM 32-4 Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 130 203
Power input	1500 W
No-load speed	210 / 330 / 470 / 740 rpm
Drilling dia. in steel	32 mm
Drilling dia. in aluminium	50 mm
Drilling dia. in wood	70 mm
Drill spindle connecting thread	MK 3 - DIN 228
Weight	7.3 kgs.

Scope of supply:
Carry case; Drift;
Auxiliary handle

MRP: ₹ 82,860



ROTARY DRILL

GMB 32 Professional



Technical Specifications

HSN code	84679900
Part no.	0 601 193 003
Power input	95 W
Magnet retention force	25 kN
Clamping flange diameter	65 mm
Working length, Z-axis	223 mm
Twist drill bit diameter	32 mm
Weight	26.0 kgs.

Scope of supply:
Carry case

MRP: ₹ 1,88,980



IMPACT DRILL < 500W

GSB 450 Professional

7

DRILLS



Technical Specifications

HSN code	84672100
Part no.	0 601 216 1FK
Input Power	500 W
Impact Rate	0-41600 bpm
No-load speed	0-2600 rpm
Max. Drill Capacity: Concrete	10 mm
Max. Drill Capacity: Steel	8 mm
Max. Drill Capacity: Wood	20 mm
Weight	1.5 kg

MRP: ₹ 3,100



IMPACT DRILL < 500W

New! GSB 450 Wrap Set Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 216 1FL
Input Power	500 W
Impact Rate	0-41600 bpm
No-load speed	0-2600 rpm
Max. Drill Capacity: Concrete	10 mm
Max. Drill Capacity: Steel	8 mm
Max. Drill Capacity: Wood	20 mm
Weight	1.5 kg

MRP: ₹ 3,830



IMPACT DRILL < 500W

GSB 501 Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 216 1FD
Input Power	500 W
Impact Rate	0 - 47.000 bpm
No-load speed	0 - 3150 rpm
Max. Drill Capacity: Concrete	13 mm
Max. Drill Capacity: Steel	10 mm
Max. Drill Capacity: Wood	25 mm
Weight	1.5 kgs.

MRP: ₹ 3,520



IMPACT DRILL 1G > 500W

GSB 13 RE Professional




Technical Specifications

HSN code	84672100
Part no.	0 601 217 1F3
Power input	650 W
No-load speed	0 - 3150 rpm
Impact rate at	0 - 47000 bpm
Drilling dia. in masonry wall	13 mm
Drilling dia. in steel	10 mm
Drilling dia. in wood	20 mm
Weight	1.6 kgs.

Scope of supply:
Auxiliary Handle; Depth Gauge;
Keyed chuck 13 mm

MRP: ₹ 5,620

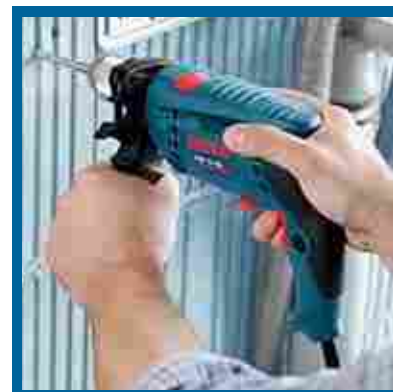

IMPACT DRILL 1G > 500W



Technical Specifications

HSN code	84672100
Part no.	0 601 228 1K0
Power input	701 W
No-load speed	0 - 3000 rpm
Impact rate at no-load speed	0 - 48000 bpm
Drilling dia. in masonry wall	16 mm
Drilling dia. in steel	12 mm
Drilling dia. in wood	30 mm
Chuck capacity	1.5 - 13 mm
Weight	1.9 kgs.

Scope of supply:
Auxiliary handle; Chuck key;
Depth gauge

MRP: ₹ 8,840

GSB 16 RE Professional



IMPACT DRILL 2G CLAM



Technical Specifications

HSN code	84672100
Part no.	0 601 1A2 1F1
Power input	800 W
No-load speed(1st/2nd Gear)	1100/3000 rpm
Impact Rate	48,000 bpm
Max. Drilling dia.(1st/2nd gear)	
Brickwork	20/16 mm
Concrete	20/16 mm
Steel	13/6 mm
Wood	40/25 mm
Weight	2.6 kgs.

Scope of supply:
Auxiliary handle; Chuck key;
Depth gauge

MRP: ₹ 13,470

GSB 20-2 RE Professional



IMPACT DRILL < 500W



Technical Specifications

HSN code	84672100
Part no.	0 601 216 1F4
Power input	500 W
No-load speed	0 - 2600 rpm
Impact rate at no-load speed	0 - 41600 bpm
Drilling dia. in masonry wall	10 mm
Drilling dia. in steel	8 mm
Drilling dia. in wood	20 mm
Chuck capacity	1 - 10 mm
Weight	1.5 kgs.

Scope of supply:
Keyed chuck 10 mm;
100 pcs accessory set

MRP: ₹ 6,030

GSB 10 RE Kit Professional



IMPACT DRILL 1G > 500W



Technical Specifications

HSN code	84672100
Part no.	0 601 217 1F6
Drilling dia. in masonry	13 mm
Drilling dia. in wood	25 mm
Drilling dia. in steel	10 mm
Power input	600 W
Impact rate	48000 bpm
No-load speed	0 - 2800 rpm
Weight	1.6 kgs.

Scope of supply:
Auxiliary Handle; Depth Gauge;
Keyed chuck 13 mm;
100 pcs accessory set

MRP: ₹ 7,500

GSB 13 RE Kit Professional



IMPACT DRILL 1G > 500W

GSB 550 (XL Kit) Professional

7



Technical Specifications

HSN code	84672100
Part no.	0 601 1A1 5F3
Input power	550 W
Rated power input	0 - 2,800 rpm
Impact rate	0 - 41,800 bpm
Drilling capacity in concrete	13 mm
Drilling capacity steel/wood	10/25 mm

Scope of supply:

5 x masonry drill bits; 5 x wood drill bits; 8 x hex keys; 10 x CRV bits 50 mm; 18 x sockets; 7 x wrenches; Magnetic bit holder; Cutter; Hammer; Cross screwdriver; Flat screwdriver; Pliers; Long nose pliers; Adapter; Socket wrench; Screw set; Wall plug set

MRP: ₹ 7,500



DRILLS

IMPACT DRILL 1G > 500W

GSB 550 (Freedom Kit) Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 1A1 5F1
Input power	550 W
Rated power input	0 - 2,800 rpm
Impact rate	0 - 41,800 bpm
Drilling capacity in concrete	13 mm
Drilling capacity steel/wood	10/25 mm

Scope of supply:

4 x masonry drill bits;
4 x wood drill bits;
2 x PH2 screw bits; Screw set;
Wall plug set

MRP: ₹ 5,470



Bosch Impact Drill Family – “Built for Champs!”



POWER. STRENGTH. STABILITY.

Chopsaws



**HEAVY
DUTY**

BENCH TOP CUT-OFF SAW

New! GCO 220 Professional

8



Technical Specifications

HSN code	84672200
Part no.	0 601 B37 3F0
Input power	2200 W
No-load speed	3800 rpm
Disc dia.	355 mm
Cutting capacity rectangle	100 x 196 mm
Cutting capacity square	119 x 119 mm
Cutting capacity round	129 x 129 mm
Cutting capacity L-Profile	130 x 130 mm
Weight	14 kg

Scope of supply:
Cutting disc

MRP: ₹ 14,010



BENCH TOP CUT-OFF SAW

GCO 14-24 Professional



Technical Specifications

HSN code	84672200
Part no.	0 601 B37 1F0
Input power	2400 W
Cutting capacity rectangle	100 x 196 mm
Cutting capacity square	119 x 119 mm
Cutting capacity L-Profile	130 x 130 mm
No-load speed	3,800 rpm
Disc dia.	355 mm
Weight	17.5 kgs.

Scope of supply:
Cutting disc

MRP: ₹ 17,220



BENCH TOP CUT-OFF SAW

GCO 14-24 J Professional



Technical Specifications

HSN code	84672200
Part no.	0 601 B37 2F0
Rated power input	2,400 W
No-load speed	3,800 rpm
Saw blade diameter	355 mm
Saw blade bore	25.4 mm
Depth x length x height	9 x 29 x 48 cm
Cutting capacity at rectangle	0° 100 x 196 mm
Cutting capacity at square	0° 119 x 119 mm
Cutting capacity at L-profile	0° 130 x 130 mm
Weight	18.1 kg

Scope of supply:
Cutting disc

MRP: ₹ 18,800



SMALL ANGLE GRINDER 4"

GWS 600 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 375 05F
Power input	670 W
No-load Speed	11000 rpm
Grinding Spindle Thread	10 M
Disc dia.	100 mm
Wire Cup Brush, dia.	70 mm
Weight	1.8 kgs

Scope of supply:
Auxiliary Handle; Guard;
Round nut; Pin Spanner;
Clamping Flange

MRP: ₹ 3,110



SMALL ANGLE GRINDER 4"

GWS 6-100 S Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 375 0B7
Rated power input	710 W
No-Load speed	11,000 rpm
Disc diameter	100 mm
Grinding spindle	M10
Weight	1.6 kgs

Scope of supply:
Clamping flange; Round nut;
Spanner wrench; Auxiliary handle;
Grinding guard

MRP: ₹ 3,980



SMALL ANGLE GRINDER 4"

GWS 750-100 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 394 0F0
Power input	750 W
Disc dia.	100 mm
Grip Size	59/54.5 mm
Perimeter	187 mm

Scope of supply:
Auxiliary Handle; Guard;
Round nut; Pin Spanner;
Clamping Flange

MRP: ₹ 4,210



MINI GRINDER 4" + 3 GRINDING DISCS

GWS 750-100 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 394 0K9
Power input	750 W
Disc dia.	100/115/125 mm
Grip Size	59/54.5 mm
Perimeter	187 mm

*with carton box

+ 4" Grinding Discs (3 No.) - 100 x 6 x 16mm

Part No. 260860853 MRP: ₹ 4,230



*Limited Period Offer

This Price List supersedes all previous editions. Prices and specifications are subject to change without notice. Edition: March 2019.

SMALL ANGLE GRINDER 4"

GWS 900-100 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 396 0F0
Rated power input	900 W
Disc dia.	100 mm
Grip size	59/54.5 mm
Perimeter	187 mm
Weight	1.8 kgs.

Scope of supply:
Wrench; Protective guard;
Auxiliary handle

MRP: ₹ 5,140



SMALL ANGLE GRINDER 4"

New! GWS 9-100 P Professional



Technical Specifications

HSN code	84672900
Part no.	06013965K0
Power input	900 W
No-load Speed	11,000 rpm
Disc diameter	125 mm
Spindle size	M10 / M14 / 5/8"
Grip size	59x54 mm
Perimeter	187 mm
Voltage	220~240 V
Weight	1.9 kg

Scope of supply:
Wrench; Protective guard;
Auxiliary handle

MRP: ₹ 6,780



SMALL ANGLE GRINDER 5"

GWS 6-125 Professional




Technical Specifications

HSN code	84672900
Part no.	0 601 375 15A
Rated power input	670 W
No-load speed	11000 rpm
Power output	400 W
Grinding spindle thread	M14
Disc dia.	125 mm
Rubber sanding plate, diameter	125 mm
Wire cup brush, dia.	70 mm
Length/Height	263/104 mm
Weight without cable	1.9 kgs.

Scope of supply:
Auxillary Handle; Guard;
Round nut; Pin Spanner;
Clamping Flange

MRP: ₹ 4,700

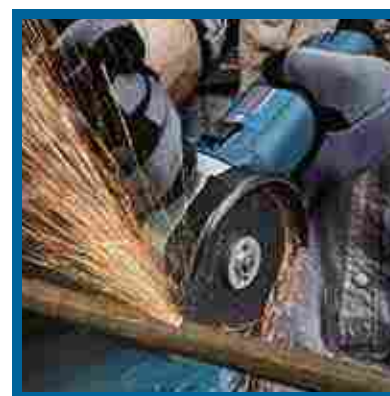

SMALL ANGLE GRINDER 5"

GWS 900-125 Professional




Technical Specifications

HSN code	84672900
Part no.	0 601 396 0F2
Rated input power	900 W
No load speed	11000 - 11000 rpm
Power output	450 W
Polished mandrel thread	M14
Disc diameter	125 mm
Length	280 mm
Width	73 mm
Height	100 mm
Weight	1.9 kg
Switch	2 way

Scope of supply:
Wrench; Protective guard;
Auxillary handle

MRP: ₹ 6,190

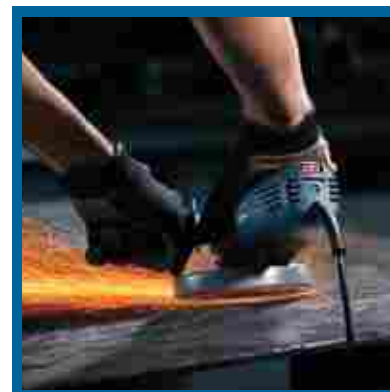

SMALL ANGLE GRINDER 5"

GWS 14-125 CI Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 824 2F1
Power input	1,400 W
No-load Speed	11000 rpm
Power output	860 W
Grinding spindle thread	M14
Disc dia.	125 mm
Rubber sanding plate, dia.	125 mm
Wire cup brush, dia.	70 mm
Weight without cable	2.2 kgs.

Scope of supply:
Auxillary Handle; Guard;
Round nut; Pin Spanner;
Clamping Flange

MRP: ₹ 9,290



SMALL ANGLE GRINDER 5"

GWS 18-125 L Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 7A3 0K0
Power input	1800 W
No-load Speed	12000 rpm
Grinding spindle thread	M14
Disc dia.	125 mm
Rubber sanding plate, dia.	125 mm
Wire cup brush, dia.	70 mm
Weight without cable	2.5 kgs.

Scope of supply:
Wrench; Protective guard;
Auxillary handle

MRP: ₹ 16,360



SMALL ANGLE GRINDER - CONCRETE

GBR 15 CAG Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 776 001
Rated power input	1500 W
No-load speed	9300 rpm
Grinding spindle thread	M14
Main handle	Bow
Grinding head, diameter	125 mm
Weight	2.6 kgs.

*Tool comes with 1 No. Bosch Concrete grinding wheel

Scope of supply:
Clamp key; Diamond grinding head;
Carry Case; 3 x replacement brush rings

MRP: ₹ 61,620



LARGE ANGLE GRINDER 7"

GWS 2000 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 8B7 0F0
Power input	2000 W
No-load speed	6500 rpm
Grinding spindle thread	M 14
Disc dia.	230 mm
Weight without cable	5.3 kgs.

Scope of supply:
Auxillary Handle; Guard;
Round nut; Pin Spanner;
Clamping Flange

MRP: ₹ 9,080



LARGE ANGLE GRINDER 7"

GWS 22-180 Professional

9



Technical Specifications

HSN code	84672900
Part no.	0 601 881 AK0
Rated power input	2200 W
No-load speed	8500 rpm
Grinding spindle thread	M14
Main handle	Shaft
Disc dia.	180 mm
Weight without cable	5 kgs.

Scope of supply:
Auxiliary Handle; Guard;
Round nut; Pin Spanner;
Clamping Flange

MRP: ₹ 12,580



LARGE ANGLE GRINDER 7"

GWS 24-180 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 853 455
Power input	2400 W
No-load speed	8500 rpm
Grinding spindle thread	M14
Disc dia.	180 mm
Weight without cable	4.9 kgs.

Scope of supply:
Auxiliary Handle; Guard;
Round nut; Pin Spanner;
Clamping Flange

MRP: ₹ 15,830



LARGE ANGLE GRINDER 7"

GWS 26-180 H Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 855 100
Rated power input	2600 W
No-load speed	8500 rpm
Grinding spindle thread	M14
Disc dia.	180 mm

Scope of supply:
Auxiliary Handle; Guard;
Round nut; Pin Spanner;
Clamping Flange

MRP: ₹ 22,150



LARGE ANGLE GRINDER 9"

GWS 20-230 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 850 155
Power input	2000 W
No-load speed	6600 rpm
Grinding spindle thread	M14
Main handle	Shaft
Disc dia.	230 mm

Scope of supply:
Auxiliary Handle; Guard;
Round nut; Pin Spanner;
Clamping Flange

MRP: ₹ 14,270



LARGE ANGLE GRINDER 9"

GWS 22-230 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 882 AF0
Power input	2200 W
No-load speed	6500 rpm
Grinding spindle thread	M 14
Main handle	Shaft
Disc dia.	230 mm
Weight without cable	5.3 kgs.

Scope of supply:
Auxiliary Handle; Guard;
Round nut; Pin Spanner;
Clamping Flange

MRP: ₹ 13,430



LARGE ANGLE GRINDER 9"

GWS 24-230 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 854 455
Power input	2,400 W
No-load speed	6500 rpm
Grinding spindle thread	M 14
Main handle	Shaft
Disc dia.	230 mm
Weight without cable	6 kgs.

Scope of supply:
Auxiliary Handle; Guard;
Round nut; Pin Spanner;
Clamping Flange

MRP: ₹ 16,600



LARGE ANGLE GRINDER 9"

GWS 26-230 H Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 856 100
Power input	2600 W
No-load speed	6500 rpm
Grinding spindle thread	M 14
Main handle	Bow (rotatable)
Disc dia.	230 mm
Weight without cable	5.2 kgs.

Scope of supply:
Auxiliary Handle; Guard;
Round nut; Pin Spanner;
Clamping Flange

MRP: ₹ 22,540



LARGE ANGLE SANDER

GWS 22 U Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 8A1 0F0
Power input	2200 W
No-load speed	5700 rpm
Disc diameter	180 mm
Shaft size	M 14
Voltage	220~240 V
Weight	4.3 kgs.

Scope of supply:
Auxiliary Handle; Round nut;
Rubber plate; Sanding disc;
Two Pin wrench

MRP: ₹ 16,350



STRAIGHT GRINDER

GGG 3000 L Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 224 0F0
Power input	300 W
No-load speed	0 - 28000 rpm
Collet chuck dia. max	8 mm
Spindle collar dia.	41 mm
Weight without cable	1.5 kgs.

Scope of supply:
Collet chuck; Lock nut;
Spanner

MRP: ₹ 8,570



STRAIGHT GRINDER

GGG 5000 L Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 224 1F0
Power input	500 W
No-load speed	33000 rpm
Collet chuck dia. max.	8 mm
Spindle collar dia.	41 mm
Weight without cable	1.4 kgs.

Scope of supply:
Collet chuck;
2 x single head open end wrench

MRP: ₹ 10,370



STRAIGHT GRINDER

GGG 28 LCE Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 221 100
Power input	650 W
No-load speed	10000 - 28000 rpm
Toolholder	Up to 8 mm
Weight without cable	1.6 kgs.

Scope of supply:
Clamping unit; 13 mm spanner;
19 mm spanner

MRP: ₹ 23,590



BT GRINDERS

GBG 35-15 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 27A 3F0
Power input	350 W
No load speed (50/60Hz)	3000 / 3600 rpm
Disc diameter	150 mm
Weight	10 kg
Grinding disc width	20 mm
Grinding disc bore	20 mm

Scope of supply:
Grinding wheel, Normal grit, Grit 24;
Grinding wheel, Normal grit, Grit 60

MRP: ₹ 11,040



BT GRINDERS



Technical Specifications

HSN code	84672900
Part no.	0 601 27A 4F0
Power input	600 W
No load speed (50/60Hz)	3000 / 3600 rpm
Disc diameter	200 mm
Weight	17 kg
Grinding disc width	25 mm
Grinding disc bore	32 mm

Scope of supply:
Grinding wheel, Normal grit, Grit 24;
Grinding wheel, Normal grit, Grit 60

MRP: ₹ 17,270

GBG 60-20 Professional



NIBBLER



Technical Specifications

HSN code	84672900
Part no.	0 601 530 103
Max. cutting depth in steel	2 mm
Max. cutting depth in aluminium	2.5 mm
Cutting width	6 mm
Power input	500 W
No-load stroke rate	2400 spm
Weight	2.0 Kgs.

Scope of supply:
Allen key WAF 2.5; Die plate;
Punch

MRP: ₹ 70,690

GNA 2.0 Professional



NIBBLER



Technical Specifications

HSN code	84672900
Part no.	0 601 533 103
Max. cutting depth in steel	3.5 mm
Max. cutting depth in aluminium	4 mm
Cutting width	6 mm
Power input	620 W
No-load stroke rate	1000 spm
Weight	3.5 kgs.

Scope of supply:
Allen key WAF 4;
Auxiliary handle;
Die plate; Punch;
Supporting arm

MRP: ₹ 1,39,560

GNA 3.5 Professional



SHEAR/CUTTER



Technical Specifications

HSN code	84672900
Part no.	0 601 506 103
Max. cutting depth in steel	2.8 mm
Max. cutting depth in aluminium	3.5 mm
Power input	500 W
No-load stroke rate	2400 spm
Weight	2.7 Kgs.

Scope of supply:
Allen key WAF 2.5;
Allen key WAF 5;
Blade; Alignment gauge

MRP: ₹ 63,900

GSC 2.8 Professional



IMPACT WRENCH

GDS 18 E Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 444 000
Power input	500 W
Torque, max. (hard/Soft Screw)	250/160 Nm
Rated speed	500 - 1300 rpm
Weight without cable	3.2 kgs.
Length	320 mm
Height	190 mm
Screw dia.	M 6 - M 18

MRP: ₹ 47,950



IMPACT WRENCH

GDS 30 Professional




Technical Specifications

HSN code	84672100
Part no.	0 601 435 103
Power input	920 W
Torque, max. (hard /Soft screwdriving applications)	1.000/500 Nm
Rated speed	860 rpm
Weight	7.3 kgs.
Length	431 mm
Height	436 mm

Scope of supply:
Auxiliary handle;
Hanging loop

MRP: ₹ 1,16,190

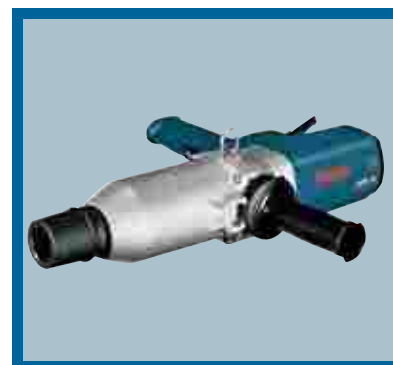

THE EXPERT IN EFFORTLESS CUTTING

Woodworking Tools



CIRCULAR SAW



Technical Specifications

HSN code	84672200
Part no.	0 601 676 0F0
Power input	1100 W
No-load speed	5200 rpm
Saw blade bore	19 mm
Saw blade dia.	184 mm
Cutting depth (90°)	65 mm
Cutting depth (45°)	47 mm
Weight without cable	3.6 kgs.

Scope of supply:
Allen key; Saw blade; Wrench **MRP: ₹ 10,780**

GKS 7000 Professional



CIRCULAR SAW + 2 CIRCULAR SAW BLADES

GKS 7000 + 2 CSB Professional



Technical Specifications

HSN code	84672200
Part no	0 601 676 0K4
Power input	1100 W
No-load speed	5200 rpm
Saw blade bore	19 mm
Saw blade dia.	184 mm
Cutting depth (90°)	65 mm
Cutting depth (45°)	47 mm
Weight without cable	3.6 kgs.

+ 7" Circular Saw Blade 40 Teeth (1 No.) - Part No. 2608644274
and 60 Teeth (1 No.) - Part No. 2608640854

*with carton box **MRP: ₹ 10,970**



*Limited Period Offer

CIRCULAR SAW

GKS 190 Professional



Technical Specifications

HSN code	84672200
Part no.	0 601 623 0F1
Power input	1400 W
No-load speed	5500 rpm
Saw blade bore	20 mm
Saw blade dia.	184 mm
Cutting depth (90°)	67 mm
Cutting depth (45°)	48 mm
Weight without cable	4.1 kgs.

Scope of supply:
Allen key WAF 5; Parallel guide; Saw blade **MRP: ₹ 12,290**



CIRCULAR SAW

GKS 235 Turbo Professional



Technical Specifications

HSN code	84672200
Part no.	0 601 5A2 0F0
Power input	2050 W
No-load speed	0 - 5300 rpm
Saw blade bore	25 mm
Saw blade dia.	235 mm
Cutting depth (90°)	85 mm
Cutting depth (45°)	65 mm
Weight without cable	7.6 kgs.

Scope of supply:
Allen key; Wrench; Saw blades **MRP: ₹ 15,880**



JIGSAW

New! GST 650 Professional



Technical Specifications

HSN code	84672200
Part no.	0 601 5A8 0F0
Power input	450 W
No-load speed	800 - 3100 rpm
Max. cutting depth in wood	65 mm
Max. cutting depth in aluminium	10 mm
Max. cutting depth in metal	3 mm
Weight	1.9 kg

Scope of supply:
1 Wood blade; + 1 Allen key;

MRP: ₹ 4,810



JIGSAW

GST 700 Professional



Technical Specifications

HSN code	84672200
Part no.	0 601 2A7 0F0
Power input	500 W
Stroke rate	1,450-3,200 spm
Cutting depth in wood	70 mm
Stroke length	20 mm
Weight	2.1 kgs.

Scope of supply:
Wood blade T111C;
1 hex key; Dust Cover

MRP: ₹ 8,300



JIGSAW

GST 85 PBE Professional



Technical Specifications

HSN code	84672200
Part no.	0 601 587 65B
Power input	580 W
No-load stroke rate	500 - 3100 spm
Weight without cable	2.4 kgs.
Cutting depth in wood	85 mm
Cutting depth in aluminium	20 mm
Cutting depth in non-alloyed steel	10 mm

Scope of supply:
1 anti-splinter guard;
3 x saw blades; Carry case

MRP: ₹ 18,000



JIGSAW

GST 150 BCE Professional



Technical Specifications

HSN code	84672200
Part no.	0 601 513 0F0
Power input	780 W
No-load stroke rate	500 - 3100 spm
Weight without cable	2.7 kgs.
Cable length	4 m
Stroke height	26 mm
Cutting depth in wood	150 mm
Cutting depth in aluminium	20 mm
Cutting depth in non-alloyed steel	10 mm

Scope of supply:
Dust extraction set; Anti-splinter guard;
Carry case; Glide shoe; 3 x saw blades

MRP: ₹ 21,560



MITER SAW



Technical Specifications

HSN code	84672200
Part no.	0 601 B29 0K0
Power input	1700 W
Weight	14.1 kgs.
Cutting capacity, 0°:	89 mm
Cutting capacity, 45° incline:	67 mm
No-load speed:	4800 rpm
Saw blade diameter:	255 mm
Saw blade bore:	25.4 mm

Scope of supply:
Allen key; Saw blade;
Wrench; Carton box

MRP: ₹ 28,370

GCM 10 MX Professional



MITER SAW



Technical Specifications

HSN code	84672200
Part no.	0 601 B21 1K0
Power input	1800 W
Cutting Capacity 00	91x187 mm
Cutting Capacity 450 mitre	91x132 mm
Cutting Capacity 450 incline	38x141 mm
Mitre setting	52° L/52° R
Incline setting	47° L/2° R
No-load speed	4300 min ⁻¹
Weight	20.7 kgs.
Saw blade diameter	305 mm
Blade body thickness	1.7 - 2.62 mm
Mounting hole dia.	25.4 mm


Scope of supply:
Saw blade; Clamp; Dust bag

MRP: ₹ 55,760

GCM 12 MX Professional



TABLE SAW



Technical Specifications

HSN code	84672200
Part no.	0 601 B30 5K0
Table size	642 x 572 mm
No-load speed	3650 rpm
Saw blade diameter	254 mm
Saw blade bore	25 mm
Incline setting	47° L / 2° R
Max. cutting capacity on the right	460 mm
Max. cutting capacity on the left	210 mm

Scope of supply:
Wood saw blade;
Push stick

MRP: ₹ 79,310

GTS 10 J Professional



PLANER



Technical Specifications

HSN code	84672900
Part no.	0 601 596 0F0
Power input	650 W
No-load speed	16500 rpm
Planing width	82 mm
Max. cutting depth	2.6 mm
Weight	2.8 kgs.

Scope of supply:
Allen key; Parallel guide;
Sharpening device for HSS blade;
Setting gauge for HSS blade

MRP: ₹ 8,910

GH0 6500 Professional



PLANER

GHO 10-82 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 594 060
Power input	710 W
Adjustable chip thickness	0 - 1,0 mm
Weight without cable	2.5 kgs.
Adjustable rebating depth	0 - 9 mm
No-load speed	16,500 rpm
Length	284 mm
Height	173 mm

Scope of supply:
Guide bracket;
Single-ended open-jaw spanner;
Stop bracket

MRP: ₹ 9,890



PLANNER

New! GHO 26-82 D Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 5A4 301
Power input	710 W
No-load Speed	16,500 rpm
Recess	9 mm
Cord Length	3 mm
Cutting Length	82 mm
Max. Cutting Depth	2.6 mm
Weight	3 kg

Scope of supply:
Dust box; Parallel guide;
Auxiliary blade

MRP: ₹ 12,140



RANDOM ORBIT SANDER

GEX 125-1 AE Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 387 5F2
Sanding pad dia.	125 mm
No-load speed	7,500 - 12,000 rpm
Orbital stroke rate	15,000 - 24,000 rpm
Eccentricity	1.25 mm
Power input	250 W
Weight	1.3 kgs.
Oscillating circuit dia.	2.5 mm
Vibration emission value ah	5.0 m/s ²
Uncertainty K	1.5 m/s ²

Scope of supply:
Dust box; Sanding disc

MRP: ₹ 8,140



RANDOM ORBIT SANDER

GEX 150 AC Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 372 768
Sanding plate diameter	150 mm
No-load speed	4500 - 12000 rpm
Orbital stroke rate	9000 - 24000 opm
Eccentricity	2 mm
Power input	340 W
Weight without cable	2.1 kgs.
Oscillating circuit diameter	4 mm
Vibration emission value ah	4 m/s ²
Uncertainty K	1.5 m/s ²

Scope of supply:
Dust extraction adapter; Adapter;
Sanding paper G80

MRP: ₹ 16,870



ORBITAL SANDER

New! GSS 140 Professional

11



Technical Specifications

HSN code	84672900
Part no.	0 601 2A8 0F0
Power input	220 W
No-load speed	14,000 rpm
No-load orbital stroke rate	28,000 rpm
Orbital diameter	1.5 mm
Sanding sheet dimension	114 x 140 mm
Sanding plate dimension	101 x 112 mm
Weight	1.2 kg

Scope of supply:
Wood Sanding paper 3 pcs

MRP: ₹ 3,650



ORBITAL SANDER

GSS 2300 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 298 0F0
Power input	190 W
No-load speed	12000 rpm
Weight	1.5 kgs.

Scope of supply:
Carton box;
3 Sanding sheets

MRP: ₹ 6,770



ROUTER

New! GKF 550 Professional



Technical Specifications

HSN code	84672900
Part no.	0 601 6A0 0F0
Power input	550 W
No-load speed	33,000 rpm
Bit size	6 1/4" mm
Weight	1.4 kg

Scope of supply:
Parallel guide; Roller guide;
Template guide; Spinners;
Straight bit

MRP: ₹ 6,530



ROUTER

POF 1400 ACE Professional



Technical Specifications

HSN code	84672900
Part no.	0 603 26C A00
Power input	1400 W
Power output	650 W
Toolholder (supplied)	6 mm
No-load speed	11,000 – 28,000 rpm
Maximum router cage stroke	55 mm
Weight	3.5 kgs.

Scope of supply:
Dust extraction adapter;
Open ended spanner;
Template guide; Plastic case;
Straight bit; Parallel guide;
Centring pin; 3 collets

MRP: ₹ 13,100



CHAINSAW

GKE 35 BCE Professional




Technical Specifications

HSN code	84678100
Part no.	0 601 597 603
Power input	2100 W
Weight without cable	4.6 kgs.
Chain bar, length	350 mm
Chain pitch	3/8 "
Chain speed	12 m/s
Cable length	2.5 m
Chain gauge	1.3 mm
Length	780 mm
Width	255 mm
Height	200 mm
Vibration emission value ah	4.8 m/s²
Uncertainty K	1.5 m/s²
Scope of supply:	MRP: ₹ 45,140
Double Guard chain bar	35 cm;
Chain	35 cm



SCREWDRIVER


GSR 6-25 TE Professional



Technical Specifications

HSN code	84672100
Part no.	0 601 445 000
Power input	701 W
Torque, max. (soft screwdriving applications)	20 Nm
Toolholder	1/4" internal hexagon
Power output	355 W
No-load speed	0 - 2500 rpm
Weight without cable	1.5 Kgs.
Length	295 mm
Height	207 mm
Rated torque	2.3 Nm
Self-drilling screw dia.	6 mm
Scope of supply:	MRP: ₹ 19,530
Carry case; Depth stop;	
Magnetic universal holder;	
Screwdriver bit; Belt clip	



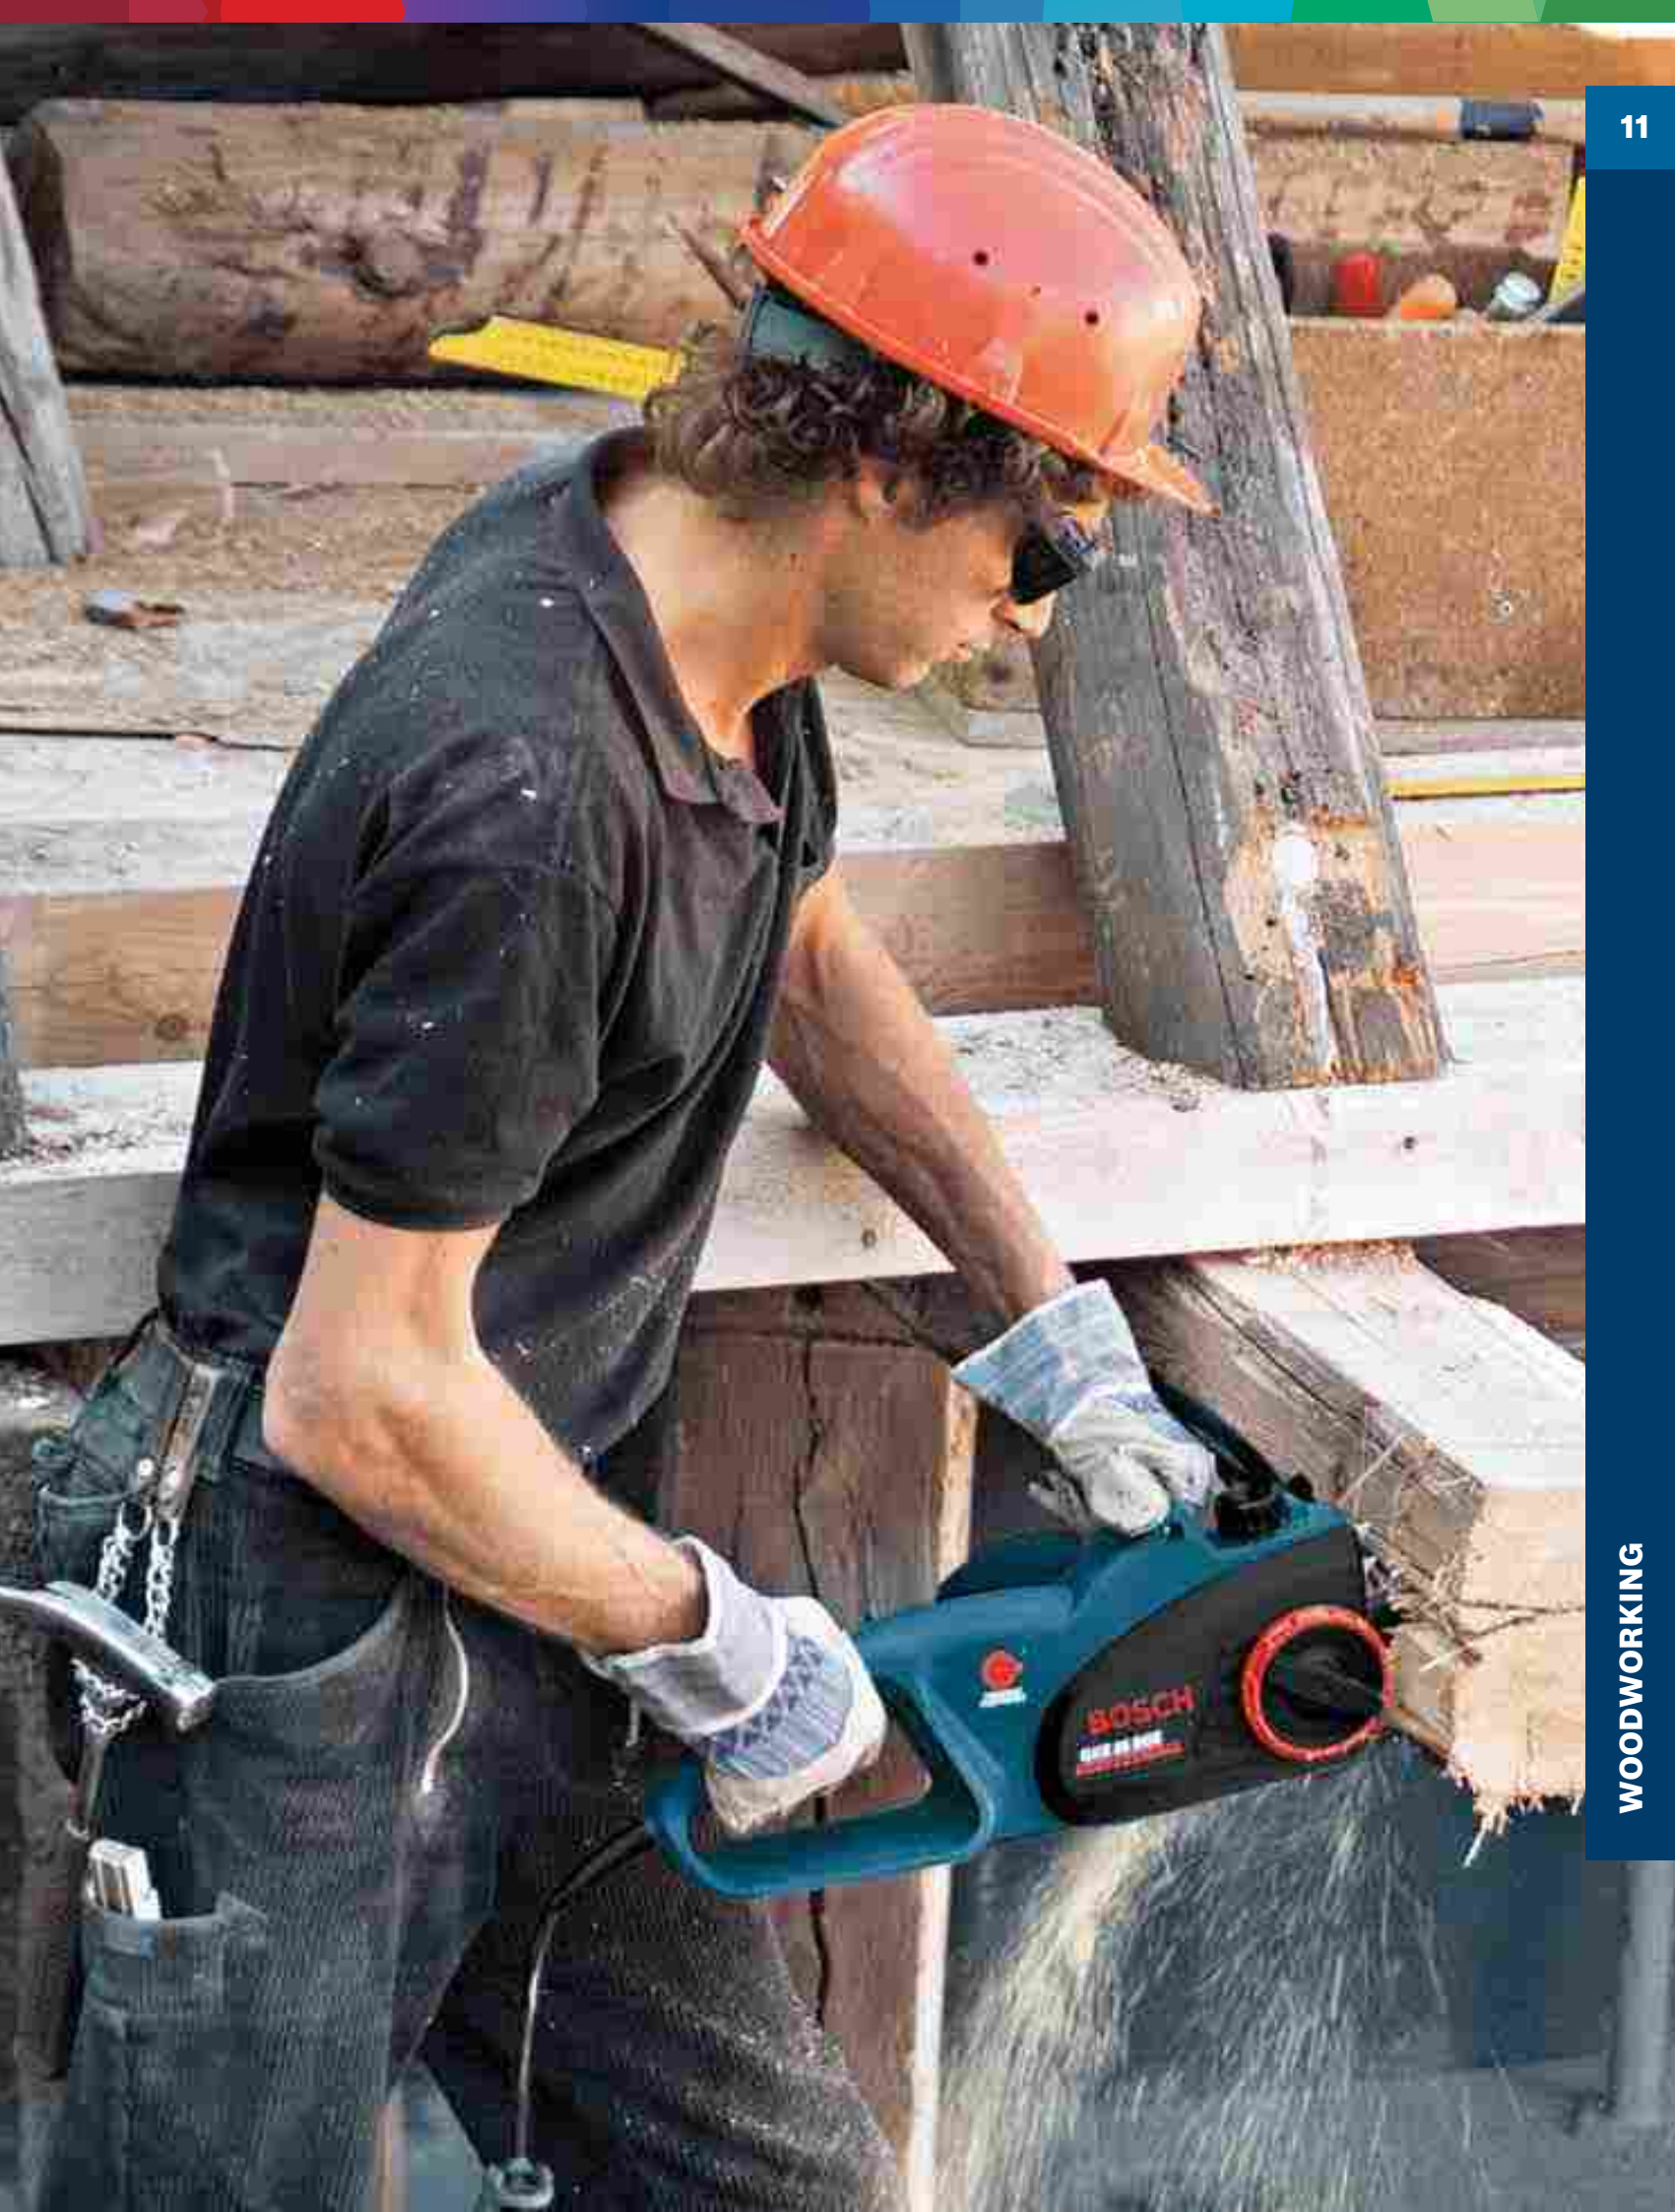

CLEANING WILL NEVER BE THE SAME AGAIN!

High-Pressure Cleaners



HIGH-PRESSURE WASHER

GHP 5-13 C Professional

12



Technical Specifications

HSN code	84248990
Part no.	0 600 910 0F0
Maximum pressure	140 bar
Working pressure	130 bar
Maximum flow rate	520 l/h
Auto-stop	Yes
Pump system	Crankshaft
Working position	Horizontal
Motor type	Induction
Absorbed power	2300 Watts
Voltage / Frequency	220-240v and 50hz
Hose length	8 m
Electric cable	5 m
Pressure adjustment (flow)	Yes
Weight	16.5 kgs.

Scope of supply:
Variably adjustable fan spray lance

MRP: ₹ 59,640



HIGH-PRESSURE WASHER

GHP 5-65 Professional



Technical Specifications

HSN code	84248990
Part no.	0 600 910 5F0
Maximum Pressure	160 bar
Maximum Flow rate	520 l/h
Motor power	2.400 W
Hose length	8 m
Auto Stop	Yes
Weight	23.5 kgs.
Integrated detergent Suction System	Yes
Handle	Metal Telescopic Handle
Pump system	Wobble Plate

Scope of supply:
Bosch gun; Roto nozzle; Hose coupling;
Adjustable 3-in-1 lance (stainless steel); Water filter

MRP: ₹ 67,490



HIGH-PRESSURE WASHER

GHP 5-75 X Professional



Technical Specifications

HSN code	84248990
Part no.	0 600 910 8F0
Maximum pressure	185 bar
Maximum flow rate	570 l/h
Motor power	2.600 W
Hose length	10 m
Auto-stop	Yes
Weight	28.2 kgs.
Integrated detergent Suction System	Yes
Handle	Metal Telescopic Handle with Hose Reel
Pump system	Wobble Plate

MRP: ₹ 1,00,740



HIGH-PRESSURE WASHER

GHP 8-15 XD Professional



Technical Specifications

HSN code	84248990
Part no.	0 600 910 3F0
Maximum flow rate	800 l/h
Maximum pressure	160 bar
Working pressure	150 bar
Auto-stop	Yes
Pump system	Wobble plate
Working position	Horizontal
Weight	40.6 kgs.

MRP: ₹ 1,31,600



Symbols and their meaning.



Guide rail
For precise cuts.



"Plus-clean" system
Electromagnetic filter cleaning for clean filter surfaces and lasting suction power.



Removable cable



Handle



Carrying case



Slim Grip
Slim Grip



Spindle lock
Faster, easier disc tool changing.



High Torque



Adjustable cutter clearance
Screw to adjust the cutter clearance according to sheet thickness.



L-BOXX
Intelligent system for transport and storage.



2 in 1 dual tool holder
Easily switch between screwdriving and bolting applications



Bosch SDS System
Fast, tool-free changing of application tools.



Bosch SDS-pro System
For fast, tool-free changing of grinding discs.



SDS-plus toolholder
Optimum power transfer. For Rotary Hammers in the 2 and 4kg class.



SDS-max toolholder
Optimum power transfer. For Rotary Hammers and Demolition Hammers from the 5kg class onwards.



Electronic
Speed preselection for adjusting to suit any application.



Constant Electronic
Power booster for heavy loads. Constant speed, even under load.



Torque Control
Torque preselection for uniform screwdriving of a large number of screws.



Anti-Rotation
Interruption of power transfer.



Overload clutch



Forward/reverse rotation
For inserting and removing screws.



Lithium-ion technology
No self-discharge. No memory effect.



Anti-rotation protective guard
Stands firm, even if the disc breaks.



Brake system
The brake reduces the run-out time of the disc by up to 80%.



Kick-Back Stop
More protection: the tool shuts down when jammed.



Restart protection
Prevents the tool from automatically starting up after a power cut.



Dust extraction
Directly into the integral dust bag on the machine and/or using an all-purpose dust extractor.



Direct cooling
For high overload capability and a long service life.



Starting current limitation
For a safe start.



Saw blade pendulum action
Adjustable 3-stage or 4-stage saw blade pendulum action.



Inox
For a perfect finish on stainless steel



Easy-Fit
A perfect fit for paper with hook and loop fastening and for rolls of paper.



Fine depth adjustment
Scale accurate to 1/10 mm for precise routing work.



Turbo Blower
Blower for optimum view of the cutting line.



Double Insulation



1 Speed



Light Weight



Auto-Lock
For fastest possible tool changes with one hand.



Turbo Power
More power for faster working.



Woodrazor
Extremely sharp blades and an exact fit.



Laser class 3R
Laser class for various measuring tools.



Laser class 2
Laser class for measuring tools.



Bosch Wood Protection System
For preventing damage.



Bosch Full Force Technology
For eliminating wasted power and space.



Vibration Control
Patented vibration damping system.

Part Number	Category	Model Number	HSN Code	MRP ₹
CORDLESS				
06019H20F0	Screwdriver	Bosch GO Solo	84672900	3,240
06019H20F1	Screwdriver	Bosch GO Kit	84672100	3,920
06019602K0	Screwdriver	IXO 3	84672900	4,420
06019A20K1	Screwdriver	GSR ProDrive	84672100	5,860
06019G80F0	Drill Driver	New! GSR 120 Li	84672100	9,400
06019F60K0	Drill Driver	GSR 12V-15 FC	84672100	21,920
06019D40K2	Drill Driver	GSR 12 V-EC	84672100	16,600
06019F81K0	Drill Drivers	GSR 180-Li	84672100	14,580
06019E81K0	Drill Drivers	GSR 18 V-EC	84672100	28,580
06019F30K4	Impact Drills	New! GSB 120 Kit	84672100	10,800
06019F83K0	Impact Drills	GSB 180-Li	84672100	15,340
06019F00K6	Impact Driver	GDR 120-Li	84672100	12,910
06019E00F6	Impact Driver	GDR 12 V-EC	84672100	20,680
06019B93F0	Impact Driver	GDR 18 V-EC	84672100	43,040
06019E01F5	Impact Wrench	GDS 12 V-EC	84672100	27,200
06019G61K0	Impact Driver	GDS 250-Li	84672900	26,910
06019D81F0	Impact Wrench	GDS 18 V-EC 250	84672100	44,600
06019A13F2	Impact Wrench	GDS 18 V-Li HT	84672100	70,960
06019B91F0	Impact Wrench	GDX 18 V-EC	84672900	37,790
06119110F2	Rotary Hammers 1-2 Kg	GBH 180-Li	84672900	30,720
0611906003	Drill Drivers	GBH 36 V-Li Plus	84672100	76,290
06019C62K1	Vacuum Cleaners	GAS 18V-1	85081100	14,680

BATTERY				
1600A00F6X	Battery-Pack	GBA 12V 2.0Ah	85076000	2,615
1600A00162	Battery-Pack	GBA 14.4 V 4.0 Ah M-C	85076000	6,860
1600A001CG	Battery-Pack	Freedom 2.0Ah 18V	85076000	4,900
1600A00163	Battery-Pack	GBA 18 V 4.0 Ah M-C	85076000	7,440
1600A01B8X	Charger	GAL 12V-40	85044030	2,980
1600A001DH	Charger	GAL 1860 CV	85044030	4,250

DEMOLITION HAMMERS				
06113385F0	Demolition Hammer < 5 Kg	GSH 500	84672100	21,040
06113370K0	Demolition Hammer < 5 Kg	GSH 5	84672100	36,100
06113168F0	Demolition Hammer < 11 Kg	GSH 11 E	84672200	46,490
0611336000	Demolition Hammer < 11 Kg	GSH 11 VC	84672100	76,820
06113351F0	Demolition Hammer > 12 Kg	GSH 16-30	84672100	1,12,790
061130A000	Demolition Hammer > 12 Kg	GSH 27 VC	84672100	2,28,840

ROTARY HAMMERS				
06112583F2	Rotary Hammer 1 - 2 Kg	GBH 200	84672100	8,090
0611250655	Rotary Hammer 1 - 2 Kg	GBH 2-22 E	84672100	11,730
0611250755	Rotary Hammer 1 - 2 Kg	GBH 2-22 RE	84672100	12,140
06112721K6	Rotary Hammer + SDS Adaptor Drill Chuck	GBH 2-24 DRE + Key Chuck	84672100	13,810
06112721K7	Rotary Hammer + Angle Grinder	GBH 2-24 DRE + GWS 750	84672100	17,170
0611251655	Rotary Hammers 1 - 2 Kg	GBH 2-26 E	84672100	15,750
0611251755	Rotary Hammers 1 - 2 Kg	GBH 2-26 RE	84672100	16,050
0611253755	Rotary Hammers 1 - 2 Kg	GBH 2-26 DRE	84672100	17,300
06112671F0	Rotary Hammers 1 - 2 Kg	GBH 2-28 DV	84672100	19,550
061123A0K0	Rotary Hammers 3 Kg	GBH 3-28 DRE	84672100	28,100
06113321F0	Rotary Hammers 4 Kg	GBH 4-32 DFR	84672100	32,610
06112690K0	Rotary Hammer 5 Kg and more	GBH 5-40 D	84672100	48,620
06112650K0	Rotary Hammer 5 Kg and more	GBH 8-45 DV	84672100	87,740
0611266000	Rotary Hammer 5 Kg and more	GBH 12-52 DV	84672100	1,05,080

Part Number	Category	Model Number	HSN Code	MRP ₹
DIAMOND TECHNOLOGY				
0601189800	Diamond Drills	GDB 180 WE	84672100	1,54,750
0601190100	Diamond Drills	GCR 180	84672100	1,15,040
0601189900	Diamond Drills	GDB 350 WE	84672100	2,33,700
0601190200	Diamond Drills	GCR 350	84679900	1,57,090
06013930F1	Marble Cutter	GDC 120	84672900	4,650
06013931F1	Marble Cutter	GDC 121	84672900	5,160
SPECIALITY TOOLS				
06019805F0	Blower	GBL 620	84145920	3,540
06019804F5	Blower	New! GBL 82-270	85081100	5,850
060194D0F0	Heat Gun	GHG 180	84672900	3,060
06012A62K0	Heat Gun	New! GHG 20-63	84672900	9,110
06012A6400	Heat Gun	New! GHG 20-60	84672900	10,130
06013A20F0	Metal Surface Polisher	GPO 950	84672900	9,490
06013890F0	Metal Surface Polisher	GPO 12 CE	84672900	14,470
06013890F1	Metal Surface Polisher	New! GPO 12 CE (Promo)	84672900	15,250
060164C8K0	Recipsaw	GSA 1100 E	84672200	17,080
060164E200	Recipsaw	GSA 1300 PCE	84672200	19,920
06019E51K0	Vacuum Cleaner	New! GAS 15 PS	85081100	17,080
060197C0F0	Vacuum Cleaner	New! GAS 12-25	85081100	20,150
06019C3060	Vacuum Cleaner	GAS 35 L SFC	85081100	65,640
06019C3360	Vacuum Cleaner	GAS 55 M AFC	85081100	1,00,260
06012370F0	Oscillating Tools	GOP 30-28	84672900	20,140
0601621703	Wall Chaser	GNF 35 CA	84672900	61,600
06012831F1	Stirrers	GVC 22 EX	84678920	98,150
DRILLS				
06014720F0	Rotary Drill	GBM 6	84672100	4,060
06014735F0	Rotary Drill	GBM 10 RE	84672100	5,090
06014775F0	Rotary Drill	GBM 13 RE	84672100	5,370
0601169055	Rotary Drill	GBM 13-2	84672100	10,480
06011B00K0	Rotary Drill	GBM 1600 RE	84672100	12,630
0601121103	Rotary Drill	GBM 23-2	84672100	66,830
0601130203	Rotary Drill	GBM 32-4	84672100	82,860
0601193003	Rotary Drill	GMB 32	84679900	1,88,980
06012161FK	Impact Drill	GSB 450	84672100	3,100
06012161FL	Impact Drill	New! GSB 450 + Wrap Set	84672100	3,830
06012161FD	Impact Drill	GSB 501	84672100	3,520
06012171F3	Impact Drill	GSB 13 RE	84672100	5,620
06012281K0	Impact Drill	GSB 16 RE	84672100	8,840
06011A21F1	Impact Drill	GSB 20-2 RE	84672100	13,470
06012161F4	Impact Drill	GSB 10 RE Kit	84672100	6,030
06012171F6	Impact Drill	GSB 13 RE Kit	84672100	7,500
06011A15F3	Impact Drill	GSB 550 (XL Kit)	84672100	7,500
06011A15F1	Impact Drill	GSB 550 (Freedom Kit)	84672100	5,470
CHOPSAWS				
0601B370F0	Bench Top Cut-off Saw	New! GCO 220	84672200	14,010
0601B371F0	Bench Top Cut-off Saw	GCO 14-24	84672200	17,220
0601B372F0	Bench Top Cut-off Saw	GCO 14-24 J	84672200	18,800
GRINDERS				
060137505F	Mini Grinder 4"	GWS 600	84672900	3,110
06013750B7	Mini Grinder 4"	GWS 6-100 S	84672900	3,980
06013940F0	Mini Grinder 4"	GWS 750-100	84672900	4,210
06013940K9	Mini Grinder 4" + 3 Grinding Discs	GWS 750-100 + 3 x Gr	84672900	4,230
06013960F0	Mini Grinder 4"	GWS 900-100	84672900	5,140

Part Number	Category	Model Number	HSN Code	MRP ₹
GRINDERS				
06013965K0	Mini Grinder 4"	New! GWS 9-100 P	84672900	6,780
060137515A	Mini Grinder 5"	GWS 6-125	84672900	4,700
06013960F2	Mini Grinder 5"	GWS 900-125	84672900	6,190
06018242F1	Mini Grinder 5"	GWS 14-125 CI	84672900	9,290
06017A30K0	Mini Grinder 5"	GWS 18-125 L	84672900	16,360
0601776001	Concrete Grinder	GBR 15 CAG	84672900	61,620
06018B70F0	Large Angle Grinder 7"	GWS 2000	84672900	9,080
0601881AK0	Large Angle Grinder 7"	GWS 22-180	84672900	12,580
0601853455	Large Angle Grinder 7"	GWS 24-180	84672900	15,830
0601855100	Large Angle Grinder 7"	GWS 26-180 H	84672900	22,150
0601850155	Large Angle Grinder 9"	GWS 20-230	84672900	14,270
0601882AF0	Large Angle Grinder 9"	GWS 22-230	84672900	13,430
0601854455	Large Angle Grinder 9"	GWS 24-230	84672900	16,600
0601856100	Large Angle Grinder 9"	GWS 26-230 H	84672900	22,540
06018A10F0	Large Angle Sander	GWS 22 U	84672900	16,350
METALWORKING				
06012240F0	Straight Grinder	GGs 3000 L	84672900	8,570
06012241F0	Straight Grinder	GGs 5000 L	84672900	10,370
0601221100	Straight Grinder	GGs 28 LCE	84672900	23,590
060127A3F0	Bench Grinder	GBG 35-15	84672900	11,040
060127A4F0	Bench Grinder	GBG 60-20	84672900	17,270
0601530103	Nibblers	GNA 2.0	84672900	70,690
0601533103	Nibblers	GNA 3.5	84672900	1,39,560
0601506103	Shears/Cutters	GSC 2.8	84672900	63,900
0601444000	Impact Wrench	GDS 18 E	84672100	47,950
0601435103	Impact Wrench	GDS 30	84672100	1,16,190
WOODWORKING				
06016760F0	Circular Saw	GKS 7000	84672200	10,780
06016760K4	Circular Saw + 2 Circular Saw Blades	GKS 7000 + 2 CSB	84672200	10,970
06016230F1	Circular Saw	GKS 190	84672200	12,290
06015A20F0	Circular Saw	GKS 235 Turbo	84672200	15,880
06015A80F0	Jigsaw	New! GST 650	84672200	4,810
06012A70F0	Jigsaw	GST 700	84672200	8,300
060158765B	Jigsaw	GST 85 PBE	84672200	18,000
06015130F0	Jigsaw	GST 150 BCE	84672200	21,560
0601B290K0	Miter Saw	GCM 10 MX	84672200	28,370
0601B211K0	Miter Saw	GCM 12 MX	84672200	55,760
0601B305K0	Table Saw	GTS 10 J	84672200	79,310
06015960F0	Planer	GHO 6500	84672900	8,910
0601594060	Planer	GHO 10-82	84672900	9,890
06015A4301	Planer	New! GHO 26-28 D	84672900	12,140
06013875F2	Random Orbit Sander	GEX 125-1 AE	84672900	8,140
0601372768	Random Orbit Sander	GEX 150 AC	84672900	16,870
06012A80F0	Orbital Sander	New! GSS 140	84672900	3,650
06012980F0	Orbital Sander	GSS 2300	84672900	6,770
06016A00F0	Router	New! GKF 550	84672900	6,530
060326CA00	Router	POF 1400 ACE	84672900	13,100
0601597603	Chainsaw	GKE 35 BCE	84678100	45,140
0601445000	Screwdriver	GSR 6-25 TE	84672100	19,530
HIGH-PRESSURE CLEANERS				
06009100F0	High-pressure Washer	GHP 5-13 C	84248990	59,640
06009105F0	High-pressure Washer	GHP 5-65	84248990	67,490
06009108F0	High-pressure Washer	GHP 5-75 X	84248990	1,00,740
06009103F0	High-pressure Washer	GHP 8-15 XD	84248990	1,31,600

WARRANTY TERMS AND CONDITIONS

Power Tools from Bosch are guaranteed against all material and manufacturing defects for a period of 6 months from the date of purchase* for Professional tools and 1 year from the date of purchase* for Professional Heavy Duty Tools.

In the event of failure of the tools due to material and manufacturing defects, we undertake to repair the tools free of charge, provided we are satisfied that,

- ▶ The power tool has not been tampered with.
- ▶ Failure has occurred due to manufacturing / material defect.
- ▶ The power tool has been purchased from an accredited dealer.
- ▶ The claim has been referred to one of the Bosch Authorized Service Centres along with the power tool, guarantee card and original tool purchase receipt or invoice.

This warranty does not cover

- ▶ All normal wear and tear parts like carbon brush, bearings, o-rings etc.
- ▶ Installation to wrong voltage, over load and wrong application.
- ▶ Use other than in accordance to handling instructions.
- ▶ Unauthorized repair carried out.
- ▶ Damage due to any unit caused by accident, misuse, wilful damage, and normal wear, claims arising from loss, fire or other calamities caused by nature or in any way being tampered with.

*Check with Local Bosch representative for Hot Air Gun Warranty.




6 months warranty from
the date of purchase*



1 year warranty from
the date of purchase*





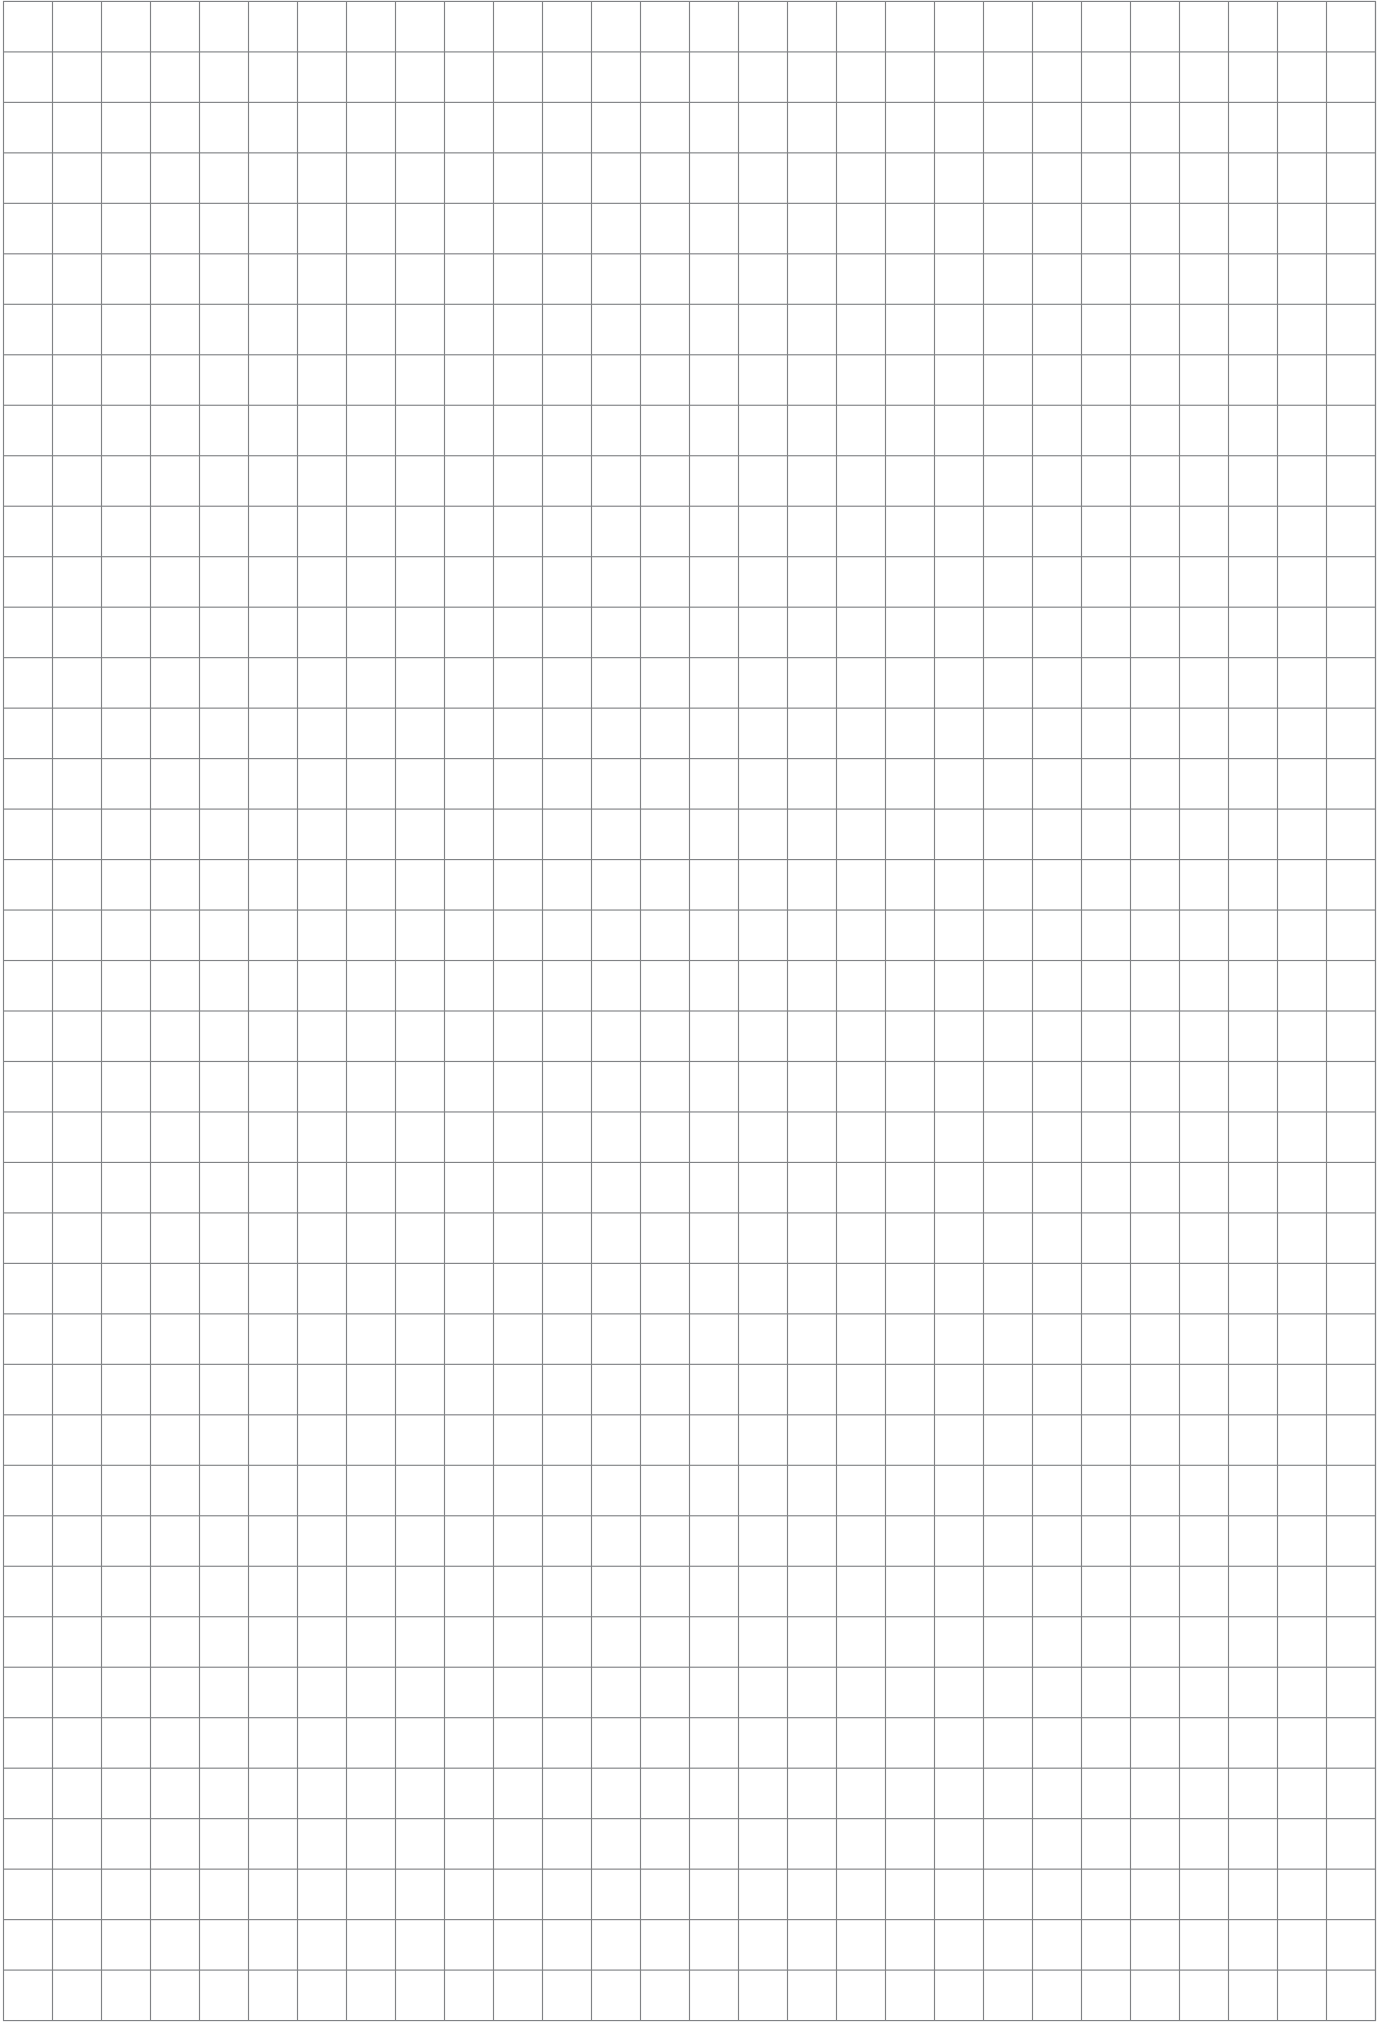



Bosch Limited, Power Tool Division

PA-AT Complex, Hosur Road, Adugodi
Bangalore - 560030

 www.facebook.com/BoschPTIndia



Customer Contact Center

1800 425 8665

Email: bpt@in.bosch.com

www.bosch-pt.co.in

Edition: March 2019